


# Heavy-Duty Latchbolt 112

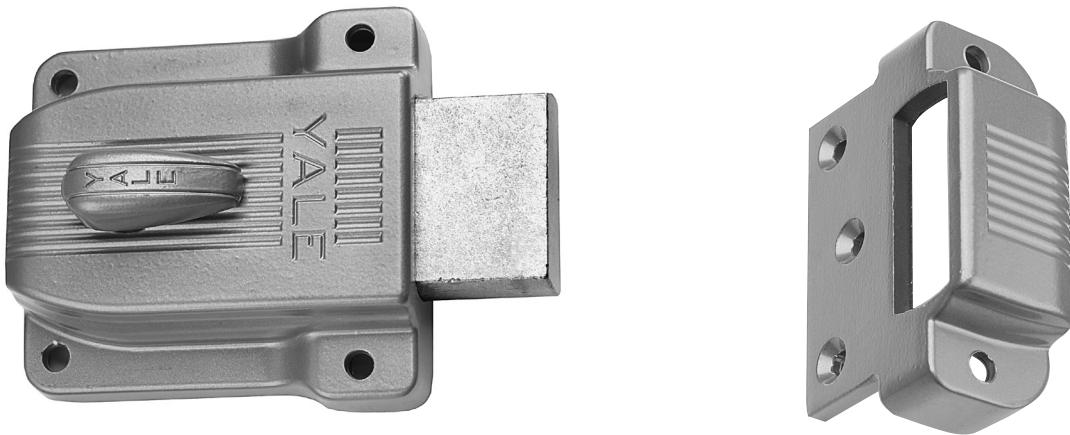


## Operation

**Outside:** Furnished standard with 5-pin rim cylinder 1109E.  
**Inside:** 180° turn of the thumbturn throws or retracts deadbolt. Also available with flat strike, model no. 112F (for outswinging doors).

Model Numbers	
112	Boxed
112F	Flat Strike, Boxed

## Dimensions And Details

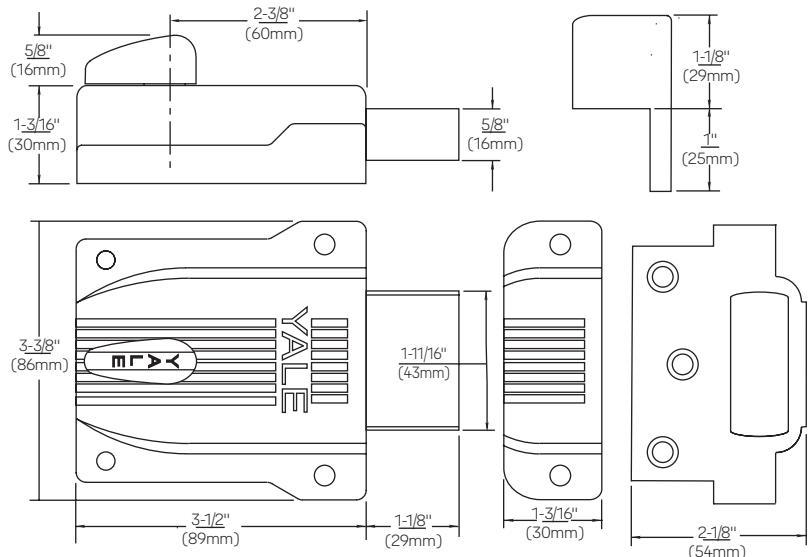

## Technical Information

Description	112
Backset	2-3/8" (60mm)
Material	Zinc Alloy
Springbolt Length	1-1/8" (29mm)
Cylinder	1109E Brass 5-pin with anti-pick mushroom drivers
Case Finishes	Sprayed Brass only
Cylinder Finish	Brass
2 Keys	RB8
Door Thickness	1-3/8" to 2-1/4" (35mm-57mm)

Dimensions are shown in inches (millimeters).

# Auxiliary Rim Lock Components




## Cylinders

Yale® auxiliary rim locks 80, 88, 112, 112-1/4, 197, and 197-1/4 are shipped standard with an 1109E brass, 5-pin, E1R (PARA) section rim cylinder. The 1109E is not available as a replacement cylinder.

Note: 1109E depths and spacings are not compatible with other cylinders available from Yale Locks & Hardware.

For alternative rim cylinders, refer to Yale® KeyMark® and/or Yale Cylinder and Keys catalog sections.

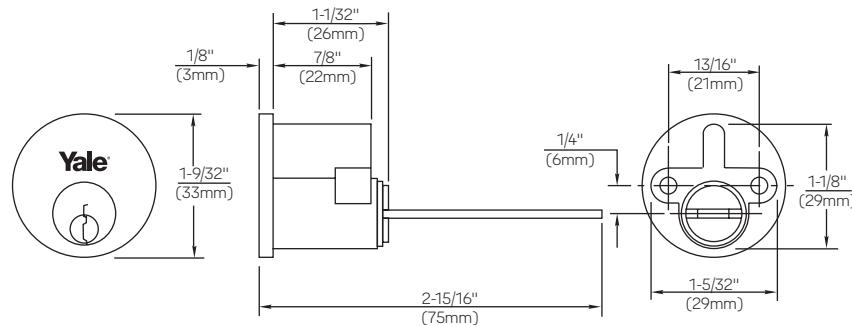

## Strikes

<b>No. 197FS Flat Strike</b>	<b>No. 112FS Flat Strike</b>	<b>No. 8RB Rim Strike</b>
Used with 197F and 197-1/4F for outswing doors.	Used with 112F and 112-1/4F for outswing doors.	Used with 80 and 88 for outswing doors.

Dimensions are shown in inches (millimeters).