

FIRE RATED STYLECRAFT ORDER FORM

Quote/Order#: _____ Email: _____ Company Name: _____
 Job Name: _____ Phone #: _____ Attention: _____

(A) DOOR INFORMATION

OPENING SIZE: WIDTH: _____ HEIGHT: _____
 UL10C FIRE RATING: ☐ 20 MIN ☐ 45 MIN ☐ 60 MIN ☐ 90 MIN
 TEMP. RISE RATED: ☐ YES ☐ NO FSC CERTIFIED: ☐ YES ☐ NO
 DOOR CONFIGURATION:
☐ SINGLE ☐ PAIR-EQUAL ☐ PAIR-UNEQUAL ☐ PAIR-DOUBLE EGRESS
 UNDER CUT: ☐ 3/4" ☐ OTHER: _____ (3/4" MAX - 1/8" MIN)
 SPECIFY LAMINATE: _____
 3 DEGREE BEVEL:
☐ SWING EDGE ☐ SWING & JAMB EDGE ☐ NO BEVEL
 FACE MATCH HPL EDGE BANDING:
☐ SWING & JAMB ☐ FULL PERIMETER

(B) PANEL 1 INFORMATION

HANDING: ☐ LEFT HAND ☐ RIGHT HAND
☐ LEFT HAND REVERSE ☐ RIGHT HAND REVERSE
 DOOR FUNCTION (PAIRS ONLY): ☐ ACTIVE ☐ PASSIVE
 DOOR BLOCKING: ☐ TOP ☐ OTHER: _____

(C) PANEL 2 INFORMATION

HANDING: ☐ LEFT HAND ☐ RIGHT HAND
☐ LEFT HAND REVERSE ☐ RIGHT HAND REVERSE
 DOOR FUNCTION (PAIRS ONLY): ☐ ACTIVE ☐ PASSIVE
 DOOR BLOCKING: ☐ TOP ☐ OTHER: _____

(D) LITE INFORMATION

LITE SIZE: WIDTH: _____ X HEIGHT: _____
☐ CUTOUT ONLY: WIDTH: _____ X HEIGHT: _____
 FRAME COLOR: ☐ BLACK ☐ OTHER: _____
 WINDOW LOCATION: ☐ ADA ☐ WINDOW LOCATION FFL: _____
 WINDOW OFFSET: ☐ CENTERED ☐ OTHER: _____


(E) HINGE INFORMATION

HINGE TYPE:
☐ 4.5" FMH STD ☐ 4.5" FMH HVY
☐ 1/4" UNDERSIZE CONTINUOUS
☐ 5/16" UNDERSIZE CONTINUOUS
☐ OTHER: _____
 HINGE CORNERS: ☐ SQUARE ☐ RADIUS
 HINGE REFERENCE LOCATION:
☐ TOP OF HEADER TO TOP OF HINGE
☐ TOP OF DOOR TO TOP OF HINGE
☐ FINISHED FLOOR TO BOTTOM OF HINGE

HINGE LOCATIONS

	HINGE 1
	HINGE 2
	HINGE 3
	HINGE 4


PLEASE FILL OUT
 FINISHED OPENING
 WIDTH(S) AND
 HEIGHT IN THE
 EMPTY BOXES TO
 THE RIGHT

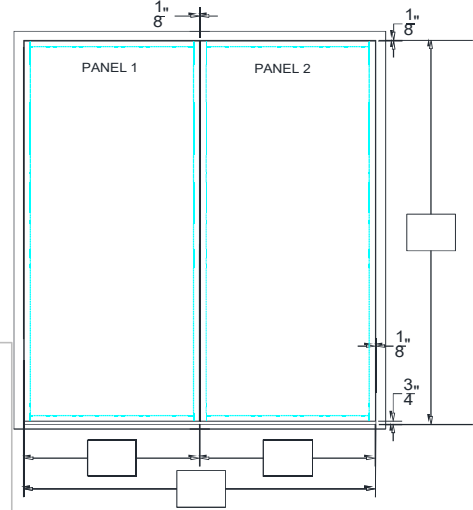

(F) CYLINDER LOCK INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING
 ON WOOD DOORS


LOCK MFR. & TEMPLATE: _____
☐ 161 ☐ 160 ☐ OTHER (PROVIDE TEMPLATE ABOVE)
 PREP REFERENCE LOCATION:
☐ TOP OF DOOR TO CENTERLINE OF LOCK
☐ HEADER TO CENTERLINE OF STRIKE PREP
☐ FINISHED FLOOR TO CENTERLINE OF LOCK
 LOCATION FROM REFERENCE: _____
 OTHER NOTES: _____



(G) MORTISE LOCK INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING
 ON WOOD DOORS

LOCK MFR. & TEMPLATE: _____
☐ GOV 86 ☐ GOV 86 W/ ESCUTCHEON
☐ OTHER (PROVIDE TEMPLATE ABOVE)
 PREP REFERENCE LOCATION:
☐ TOP OF DOOR TO CENTERLINE OF LOCK
☐ HEADER TO CENTERLINE OF STRIKE
☐ FINISHED FLOOR TO CENTERLINE OF LOCK
 PREP LOCATION FROM REFERENCE: _____
 OTHER NOTES: _____



(H) EXIT DEVICE INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING
 ON WOOD DOORS

PANIC/EXIT DEVICE MFG X MODEL X TRIM: _____
 LOCATION FROM HEADER TO STRIKE: _____
 PROVIDE INFORMATION BELOW FOR RIM PANIC DEVICES:
 FRAME MANUFACTURER: _____
 FRAME STOP HEIGHT: _____

(I) FLUSH BOLT INFO (PASSIVE PANEL) MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

FLUSH BOLT MFG X MODEL: _____

LOCATION: ☐ TOP ☐ BOTTOM ☐ BOTH ☐ OTHER: _____

(J) POWER TRANSFER MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

☐ EPT MFG X MODEL: _____

LOCATION FROM TOP OF DOOR TO CL: _____

☐ ELECTRIC HINGE MFG X MODEL: _____

AT HINGE #: _____ LOCATION

☐ RACEWAY PREP

OTHER NOTES: _____

*SELECT EPT WIRE
RELEASE LOCATION ON
DOOR



☐ WIRE RELEASE
AT TOP

☐ WIRE RELEASE
AT BOTTOM

(K) STRIKE (PASSIVE PANEL) MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

☐ ASA ☐ OTHER: _____

(L) CLOSER INFORMATION MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

CONCEALED CLOSER MFG X MODEL: _____

OVERHEAD STOP MFG X MODEL X DEGREE OF OPENING: _____

SURFACE MOUNTED CLOSER: _____

(M) MISC. HARDWARE/PREPS MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

HARDWARE MFG X MODEL: _____

OTHER NOTES: _____