

FIRE RATED STYLECRAFT ORDER FORM

Quote/Order#: _____ Email: _____ Company Name: _____
 Job Name: _____ Phone #: _____ Attention: _____

(A) DOOR INFORMATION

OPENING SIZE: WIDTH: _____ HEIGHT: _____
 UL10C FIRE RATING: 20 MIN 45 MIN 60 MIN 90 MIN
 TEMP. RISE RATED: YES NO
DOOR CONFIGURATION:
 SINGLE PAIR-EQUAL PAIR-UNEQUAL PAIR-DOUBLE EGRESS
UNDER CUT: 3/4" OTHER: _____ (3/4" MAX - 1/8" MIN)
SPECIFY LAMINATE: _____
3 DEGREE BEVEL:
 SWING EDGE SWING & JAMB EDGE NO BEVEL
FACE MATCH HPL EDGE BANDING:
 SWING & JAMB FULL PERIMETER

(B) PANEL 1 INFORMATION

HANDING: LEFT HAND RIGHT HAND
 LEFT HAND REVERSE RIGHT HAND REVERSE
DOOR FUNCTION (PAIRS ONLY): ACTIVE PASSIVE
DOOR BLOCKING: TOP OTHER: _____

(C) PANEL 2 INFORMATION

HANDING: LEFT HAND RIGHT HAND
 LEFT HAND REVERSE RIGHT HAND REVERSE
DOOR FUNCTION (PAIRS ONLY): ACTIVE PASSIVE
DOOR BLOCKING: TOP OTHER: _____


(D) LITE INFORMATION

LITE SIZE: WIDTH: _____ X HEIGHT: _____
 CUTOUT ONLY: WIDTH: _____ X HEIGHT: _____
FRAME COLOR: BLACK OTHER: _____
WINDOW LOCATION: ADA WINDOW LOCATION FFL: _____
WINDOW OFFSET: CENTERED OTHER: _____

(E) HINGE INFORMATION

HINGE TYPE:
 4.5" FMH STD 4.5" FMH HVY
 1/4" UNDERSIZE CONTINUOUS
 5/16" UNDERSIZE CONTINUOUS
 OTHER: _____
HINGE CORNERS: SQUARE RADIUS
HINGE REFERENCE LOCATION:
 TOP OF HEADER TO TOP OF HINGE
 TOP OF DOOR TO TOP OF HINGE
 FINISHED FLOOR TO BOTTOM OF HINGE

HINGE LOCATIONS

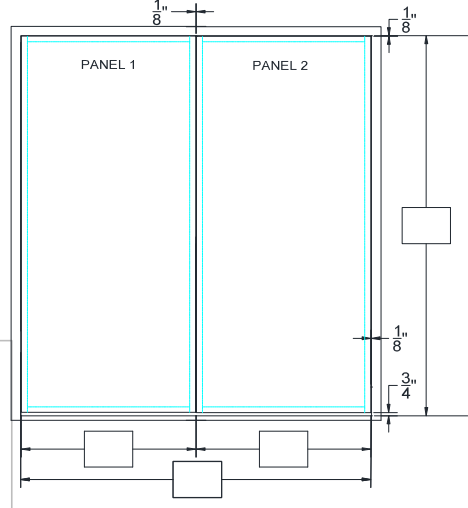


PLEASE FILL OUT FINISHED OPENING WIDTH(S) AND HEIGHT IN THE EMPTY BOXES TO THE RIGHT

(F) CYLINDER LOCK INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS


LOCK MFR. & TEMPLATE: _____
 161 160 OTHER (PROVIDE TEMPLATE ABOVE)
PREP REFERENCE LOCATION:
 TOP OF DOOR TO CENTERLINE OF LOCK
 HEADER TO CENTERLINE OF STRIKE PREP
 FINISHED FLOOR TO CENTERLINE OF LOCK
LOCATION FROM REFERENCE: _____
OTHER NOTES: _____



(G) MORTISE LOCK INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

LOCK MFR. & TEMPLATE: _____
 GOV 86 GOV 86 W/ ESCUTCHEON
 OTHER (PROVIDE TEMPLATE ABOVE)
PREP REFERENCE LOCATION:
 TOP OF DOOR TO CENTERLINE OF LOCK
 HEADER TO CENTERLINE OF STRIKE
 FINISHED FLOOR TO CENTERLINE OF LOCK
PREP LOCATION FROM REFERENCE: _____
OTHER NOTES: _____



(H) EXIT DEVICE INFORMATION

MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

PANIC/EXIT DEVICE MFG X MODEL X TRIM: _____
LOCATION FROM HEADER TO STRIKE: _____
PROVIDE INFORMATION BELOW FOR RIM PANIC DEVICES:
FRAME MANUFACTURER: _____
FRAME STOP HEIGHT: _____

(I) FLUSH BOLT INFO (PASSIVE PANEL) MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

FLUSH BOLT MFG X MODEL: _____

LOCATION: TOP BOTTOM BOTH OTHER: _____

(J) POWER TRANSFER MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

EPT MODEL X MFG: _____

LOCATION FROM TOP OF DOOR TO CL: _____


ELECTRIC HINGE MODEL X MFG: _____

AT HINGE #: _____ LOCATION

RACEWAY PREP

OTHER NOTES: _____

*SELECT EPT WIRE
RELEASE LOCATION
ON DOOR



(K) STRIKE (PASSIVE PANEL) MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

ASA OTHER: _____

(L) CLOSER INFORMATION MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

CONCEALED CLOSER MODEL X MFG: _____

OVERHEAD STOP MODEL X MFG X DEGREE OF OPENING: _____

SURFACE MOUNTED CLOSER: _____

(M) MISC. HARDWARE/PREPS MUST BE LISTED FOR SPECIFIED FIRE RATING ON WOOD DOORS

HARDWARE MFG X MODEL: _____

OTHER NOTES: _____