

StyleCraft

PRODUCT CUT SHEET




For 1 3/4" Thick Doors and 3/16", 1/4" or 5/16" Glass.

- ➔ 18 Ga, Cold Rolled Steel
- ➔ Mitered and Welded Corners
- ➔ Welded Reinforcing Clips at Corners
- ➔ Counter-Sunk Mounting Screw Holes
- ➔ #8 x 1 3/4" Phillips Head SMS
- ➔ Available in Uneven and Fractional Sizes
- ➔ Gray Primer (GPZ) Powder Coat Finish

Available Options

- ➔ Torx Security Screws
- ➔ Galvannealed - A40 Steel
- ➔ Zinc Electro-Plating
- ➔ Glass & Glazing Tape
- ➔ Lead Lining - 1/16" Thick

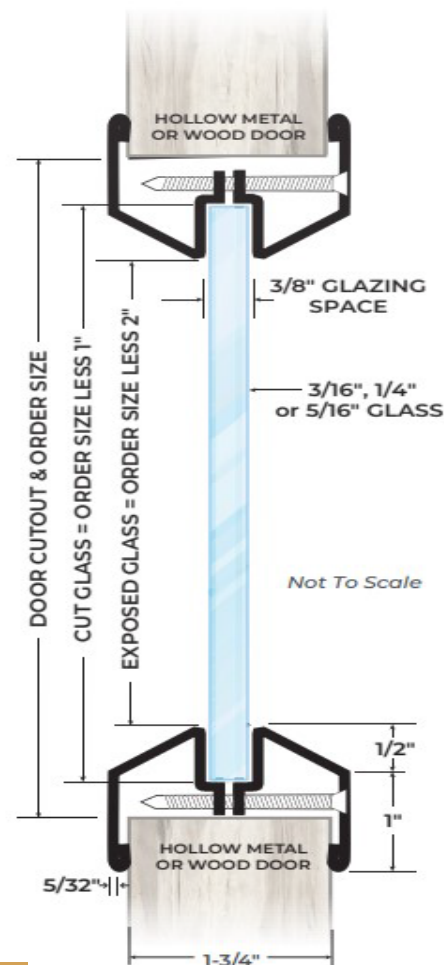


Powder Coat Color Chart

Colors may vary slightly. Please request a sample if color is crucial for your project.


Standard Colors



GPZ-Gray Primer



T-Tan




BPR-Beige Primer
(matches Steelcraft)



DKB-Dark Bronze



PTY-Putty
(matches Anemostat Beige)




CAB-California Bronze
(matches Anemostat)

Optional Colors



B-Brass



WB-Walnut Brown
(matches Timely Brownstone)



ASL-Aluminum Silver
(metallic)



TBL-Textured Black
GBL-Gloss Black
MBL-Matte Black



MW-Magnolia White
(matches Timely Western White)



W-White