

SPEC SHEET HCG-10 PLUS

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

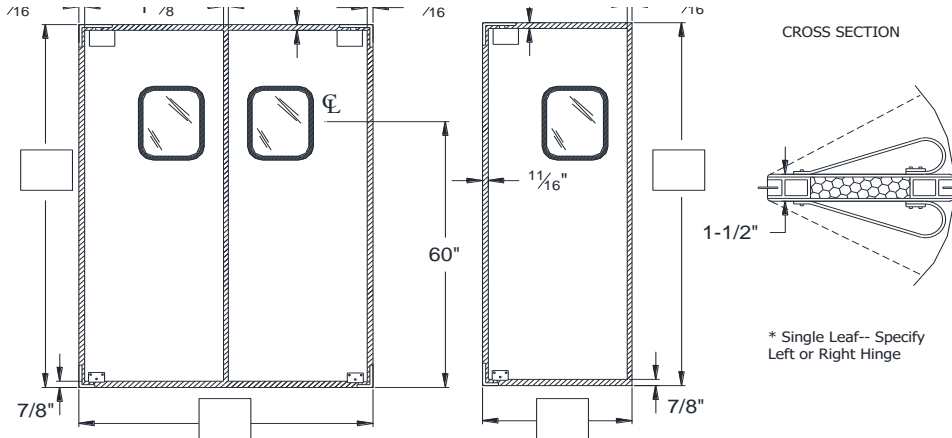

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body 1-1/2" thick with high impact, thermoplastic material surface, bonded to a high strength PVC frame with a foam core. Provided with full perimeter seal. 18" black bumper or 24" high scuff plates. 14" x 16" clear acrylic safety window set in black rubber molding. Door assembly includes the original "NO SPRING" **Easy Swing®** hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR COLOR: Forest Green Cadet Blue White Metallic Gray Cloud Gray Antique White
 Chocolate Brown Red Medium Brown Royal Blue Navy Black Beige
 Off White Fudge Brown Gray

WINDOW: Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor
 Other: _____

JAMB GUARD: 3" X 9" 5" X 18"

STANDARD 18" Bumper OR 24" Black ABS Scuff Plate
 OPTION:

PLATE: Specify Height: _____
 Color/Material: Black Same Color As Door Stainless Steel Other _____

BUMPER: Standard Black Tear Drop Polyethylene Height: 12 18 24 30 36 42
 Aluminum Bumper Strip:

OTHER SPECIFICATIONS: _____

APPROVED BY: _____ **DATE:** _____

Eliason Corporation

DOCUMENT NOT CONTROLLED WHEN PRINTED