

# SPEC SHEET LWP-CAFÉ/GATE

Quote/Order# \_\_\_\_\_

Company Name \_\_\_\_\_


Attention \_\_\_\_\_

Email \_\_\_\_\_

Phone# \_\_\_\_\_

Job Name \_\_\_\_\_

Check One Box for Desired Option

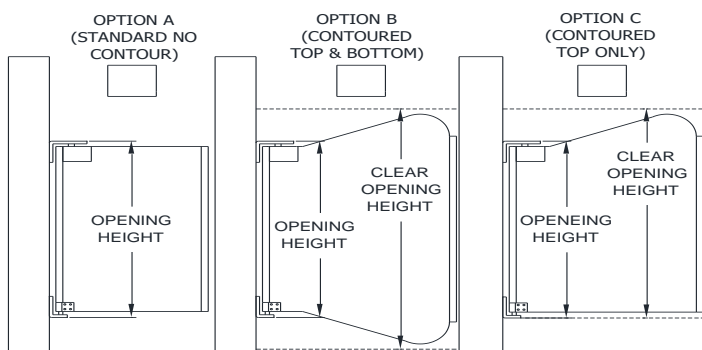


CLEAR OPENING HEIGHT			
FINISHED OPENING WIDTH			
	18" to 29.625"	29.6875" to 35.625"	35.6875" to 48"
OPTION B	FOH+6"	FOH+8"	FOH+10"
OPTION C	FOH+3"	FOH+4"	FOH+5"

\*FOH denotes Finished Opening Height


MAX OPENING HEIGHT			
FINISHED OPENING WIDTH			
	18" to 29.625"	29.6875" to 35.625"	35.6875" to 48"
OPTION A	48.75	48.75	48.75
OPTION B	42.75	40.75	38.75
OPTION C	45.75	44.75	43.75

Fill in Opening Width, Opening Height and Handing below.  
(Opening Height doesn't include selected contour)

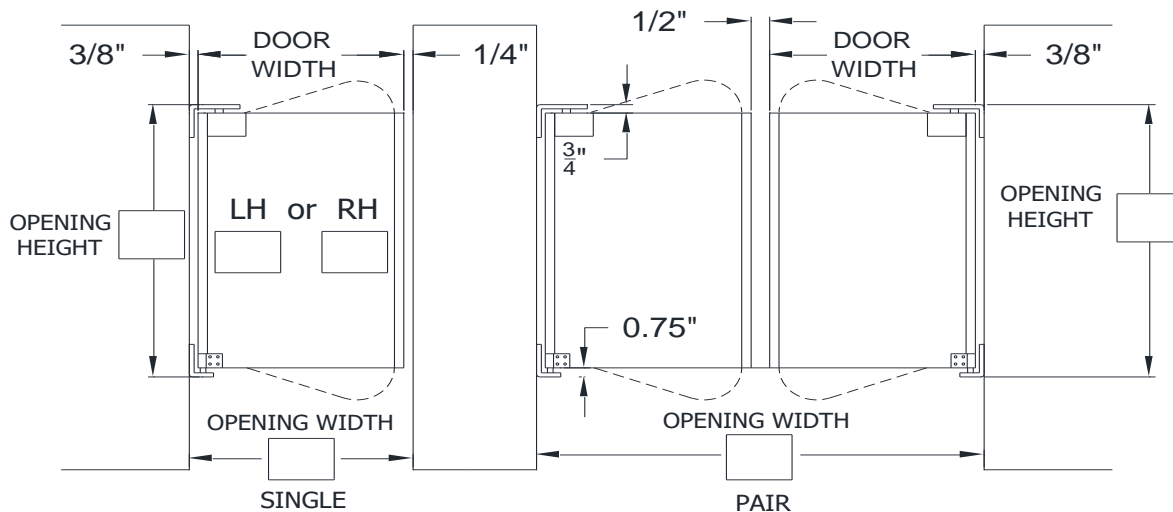

**STANDARD SPECIFICATIONS:** Door body 0.063" tempered aluminum alloy, satin anodized finish. No contour is standard. Straight cut (no contours) is standard. Door assembly includes the original Easy Swing® hinges. (FO Height Minimum 24", For Maximum see table.)

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations. Fasteners for mounting to jamb included.



Specify Laminate: \_\_\_\_\_

Additional Specifications: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

**Eliason Corporation - Senneca Holdings**