

SPEC SHEET LWP-CAFÉ/GATE WITH POST

Quote/Order# _____

Company Name _____

Attention _____


Email _____

Phone# _____


Job Name _____

Check One Box for Desired Option


OPTION A
(STANDARD NO
CONTOUR)



OPTION B
(CONTOURED
TOP & BOTTOM)



OPTION C
(CONTOURED
TOP ONLY)



CLEAR OPENING HEIGHT

FINISHED OPENING WIDTH

	19.5" to 31.125"	31.1875" to 37.125"	37.1875" to 48"
OPTION B	FOH+3"	FOH+4"	FOH+5"
OPTION C	FOH+3"	FOH+4"	FOH+5"



*FOH denotes Finished Opening Height

MAX OPENING HEIGHT


FINISHED OPENING WIDTH

	19.5" to 31.125"	31.1875" to 37.125"	37.1875" to 48"
OPTION A	54	54	54
OPTION B	48	46	44
OPTION C	51	50	49

Fill Post Height (Finished Opening Height), Handing and Opening Width Below.

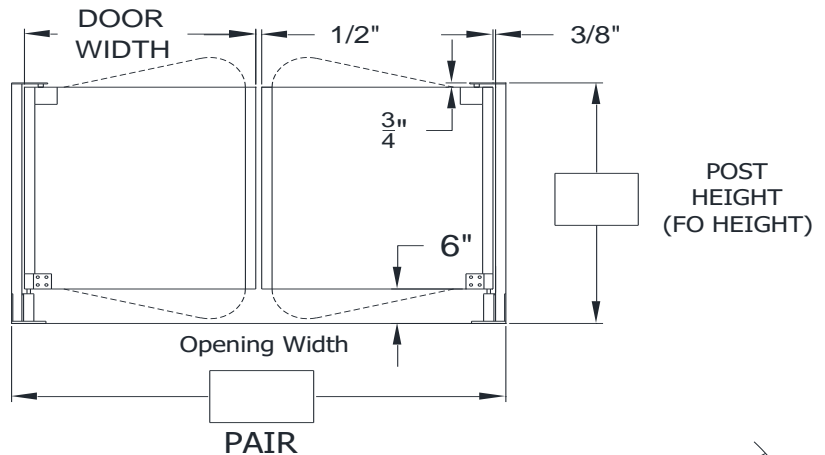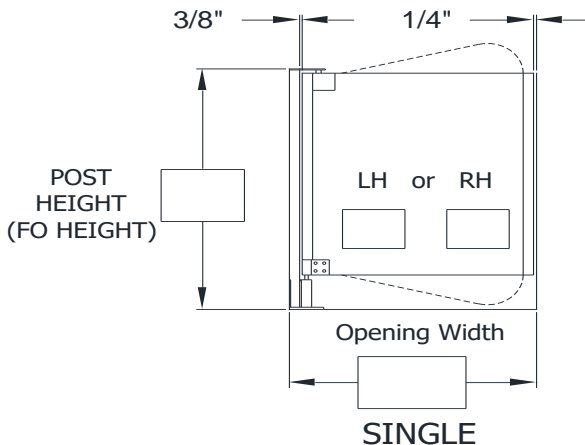

CROSS SECTION



STANDARD SPECIFICATIONS: Door body 0.063" tempered aluminum alloy, satin anodized finish. No contour is standard. Door assembly includes the original Easy Swing® hinges installed on black powder coated freestanding gate post. (FO Height Minimum 24", For Maximum see table: Post Height Maximum 54")

INSTALLATION DETAILS: No Jamb needed for installation. Fasteners to mount to concrete floor included.

Specify Laminate: _____

Additional Specifications: _____

APPROVED BY: _____ DATE: _____

Eliason Corporation - Senneca Holdings