

SPEC SHEET HCP-10

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

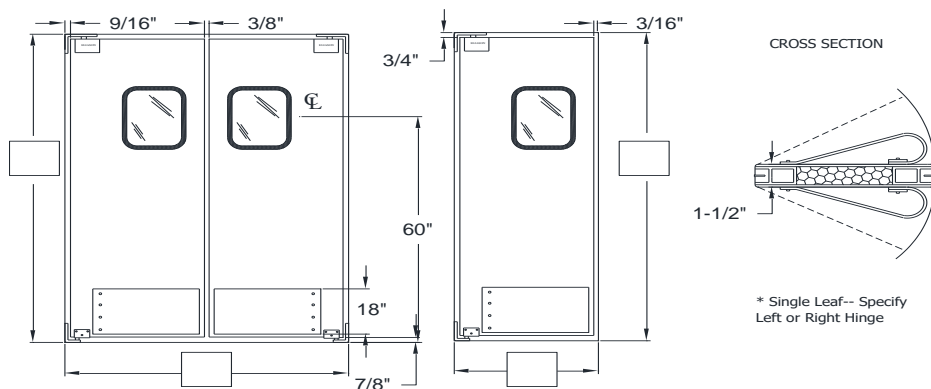

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body 1-1/2" thick with high impact, thermoplastic material surface, bonded to a high strength PVC frame with a foam core. Provided with full perimeter seal. 18" black bumper or 24" high scuff plates. 14" x 16" clear acrylic safety window set in black rubber molding. Door assembly includes the original "NO SPRING" **Easy Swing®** hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR COLOR: ☐ Forest Green ☐ Cadet Blue ☐ White ☐ Metallic Gray ☐ Cloud Gray ☐ Antique White
 ☐ Chocolate Brown ☐ Red ☐ Medium Brown ☐ Royal Blue ☐ Navy ☐ Black ☐ Beige
 ☐ Off White ☐ Fudge Brown ☐ Gray

WINDOW: ☐ Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor
 ☐ Other: _____

JAMB GUARD: ☐ 3" X 9" ☐ 5" X 18"

STANDARD ☐ 18" Bumper OR ☐ 24" Black ABS Scuff Plate
 OPTION:

PLATE: Specify Height: _____
 Color/Material: ☐ Black ☐ Same Color As Door ☐ Stainless Steel ☐ Other _____

BUMPER: Standard Black Tear Drop Polyethylene Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 42
 Aluminum Bumper Strip: ☐

OTHER SPECIFICATIONS: _____

APPROVED BY: _____ **DATE:** _____

Eliason Corporation

DOCUMENT NOT CONTROLLED WHEN PRINTED