

# SCP-15 ORDER FROM

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

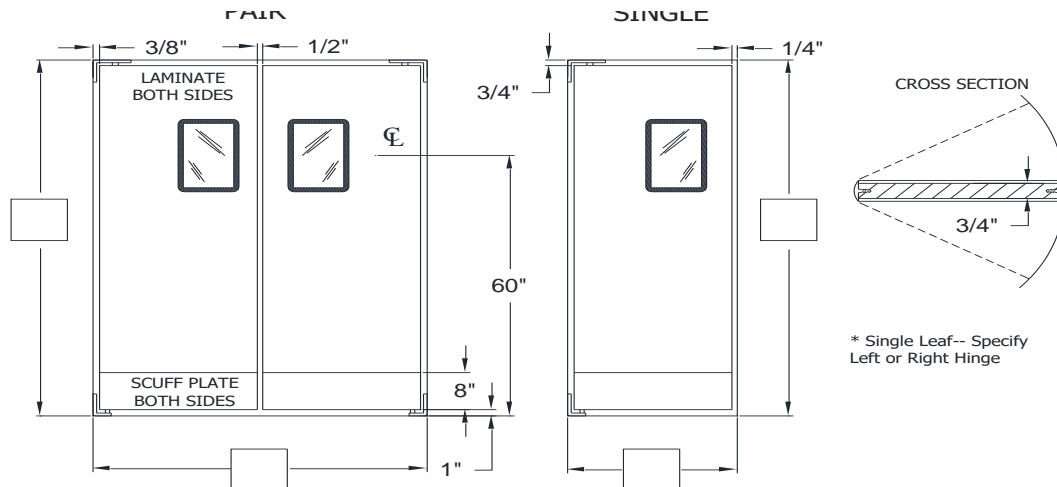

Fill in Opening Size in the Blanks Provided Above



**STANDARD SPECIFICATIONS:** Door body 3/4" wood core with High Pressure Laminate (HPL) cladding on both sides. 8" high black ABS scuff plate, both sides. 9" x 14" Flush window. Door assembly includes the original "HIDDEN HARDWARE" Eliason Swing® hinges.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

## SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR FINISH: ☐ Specify Laminate: \_\_\_\_\_.

WINDOW: ☐ Standard 9" X 14" Flush Window, Up 60" to Center of Window from Floor  
☐ Other: \_\_\_\_\_

PLATE: ☐ Standard 8" High ☐ Specify Height: \_\_\_\_\_  
 Color/Material: ☐ Black ABS ☐ Galvanized Steel ☐ Stainless Steel ☐ Other \_\_\_\_\_.

OTHER SPECIFICATIONS: \_\_\_\_\_.

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

Eliason Corporation

DOCUMENT NOT CONTROLLED WHEN PRINTED