

# ENG-1 ORDER FROM

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

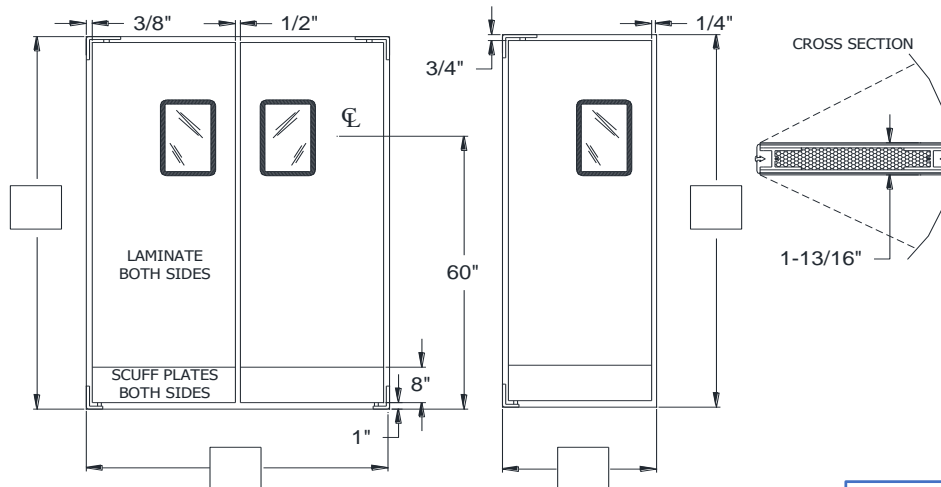

Fill in Opening Size in the Blanks Provided Above



**STANDARD SPECIFICATIONS:** Door body 1-13/16" thick with laminated high impact, thermoplastic material surface, bonded to a high strength PVC frame with a polymer cell core. 8" high scuff plates. 9" x 14" flush clear acrylic window. Door assembly includes "HIDDEN HARDWARE" Easy Swing® hinges, 1/4" - 20 x 1" thread cutting screws, #14 -1-1/2" sheet metal/wood screws and 3/8" X 2-1/4" rawl bolts for jamb by others.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

## SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR FINISH: Specify Laminate: \_\_\_\_\_.

WINDOW: ☐ Standard 9" X 14" Flush Window, Up 60" to Center of Window from Floor  
☐ Other: \_\_\_\_\_

PLATE: Height: ☐ Standard 8" High ☐ Other Height: \_\_\_\_\_.  
 Color/Material: ☐ Standard Black ABS ☐ Stainless Steel ☐ Galvanized Steel  
☐ Other: \_\_\_\_\_.

OTHER SPECIFICATIONS: \_\_\_\_\_.

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

Eliason Corporation

DOCUMENT NOT CONTROLLED WHEN PRINTED