

# SCG-3 ORDER FORM

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

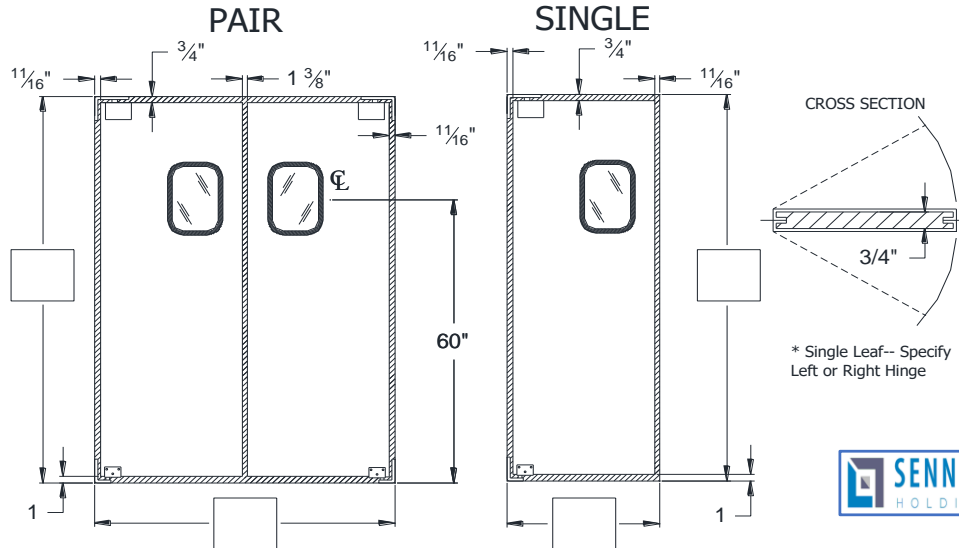

**Fill in Opening Size in the Blanks Provided Above**

**STANDARD SPECIFICATIONS:** Door body 3/4" moisture resistant composite wood core, gasketed. metal clad. Full height stainless steel panels, both sides including hinge covers. 9" x 14" clear acrylic safety window set in black rubber molding. Door assembly includes the original "NO SPRING" Easy Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

## SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

HANDING: ☐ Left ☐ Right ☐ Pair

WINDOW: ☐ Standard 9" X 14" In Black Rubber Molding, Up 60" to Center of Window from Floor  
☐ Other: \_\_\_\_\_

JAMB GUARD: ☐ 3" X 9" ☐ 5" X 18" ☐ None

PLATE: Specify Height: \_\_\_\_\_  
 Color/Material: ☐ Stainless Steel ☐ Galvanized Steel ☐ Black ABS ☐ Other \_\_\_\_\_

BUMPER: Standard Black Tear Drop Polyethylene, Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 42  
 Aluminum Bumper Strip: ☐

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

**Eliason Corporation**