

SPEC SHEET SCP-15

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

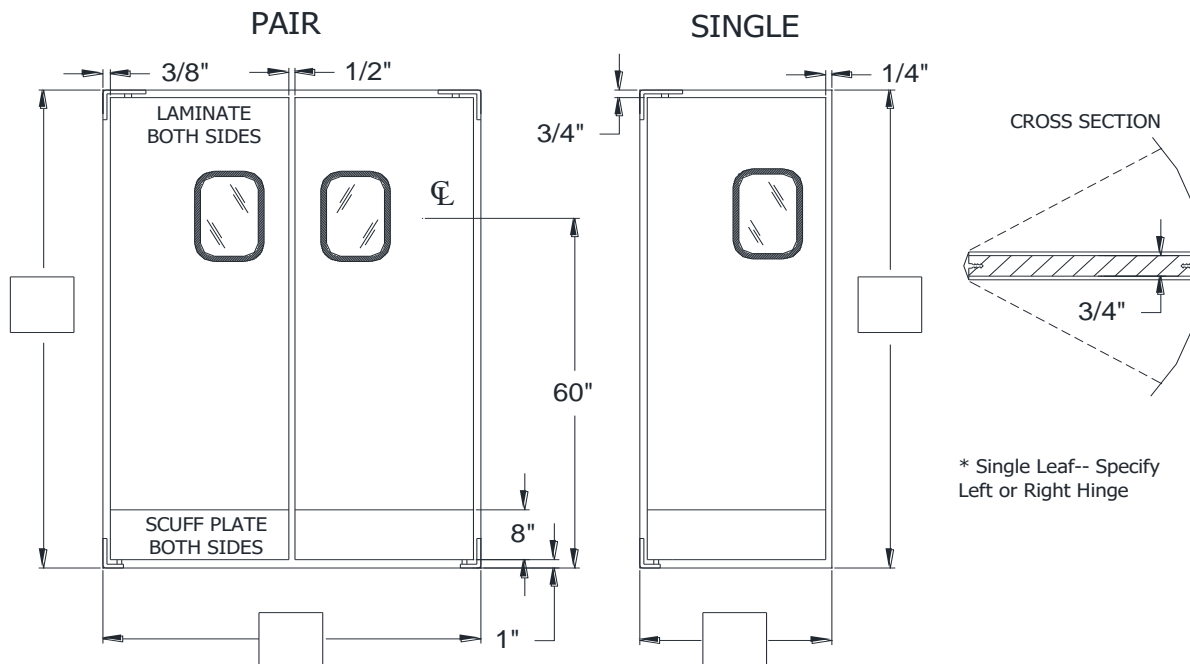

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body 3/4" wood core with High Pressure Laminate (HPL) cladding on both sides. 8" high black ABS scuff plate, both sides. 9" x 14" Flush window. Door assembly includes the original "HIDDEN HARDWARE" Eliason Swing® hinges.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR FINISH: ☐ Specify Laminate: _____

WINDOW: ☐ Standard 9" X 14" Flush Window, Up 60" to Center of Window from Floor
☐ Other: _____

PLATE: ☐ Standard 8" High ☐ Specify Height: _____
 Color/Material: ☐ Black ABS ☐ Galvanized Steel ☐ Stainless Steel ☐ Other _____

BUMPER: Black Tear Drop Polyethylene, Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 42
 Aluminum Bumper Strip: ☐

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____

Eliason Corporation