

Quote/Order#			Company Name	•		
Attention			Email			
Phone#			Job Name			
Check One Box for Desired Option			CLEAR OPENING HEIGHT			
				FINISHED OF	PENING WIDTH	
			_	19.5" to 31.125"		37.1875" to 48
OPTION A (STANDARD NO	OPTION B (CONTOURED	OPTION C (CONTOURED	OPTION B	FOH+3"	FOH+4"	FOH+5"
CONTOUR)	TOP & BOTTOM)	TOP ONLY)	OPTION C	FOH+3"	FOH+4"	FOH+5"
				*FC	)H denotes Finished	Opening Heig
•	CLEAR	CLEAR	MAX OPENING HEIGHT			
	OPENING HEIGHT	OPENING	FINISHED OPENING WIDTH			DTH
OPENING	OPENING	HEIGHT OPENING	_	19.5" to 31.125"	31.1875" to 37.125"	37.1875" to 4
HEIGHT	HEIGHT	HEIGHT	OPTION A	54	54	54
			OPTION B	48	46	44
<u> </u>		Ш	OPTION C	51	50	49
	Fill in Post Height ( (Finishe	Finished Opening d Opening Height	• /-			
	3/8" 1/4	"	DOOR WIDTH	- 1/2"	3/8"	
DOCT				3 <sub>"</sub>		
POST HEIGHT	LH or				POST	-

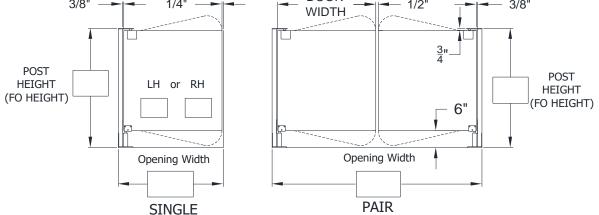

**STANDARD SPECIFICATIONS**: Door body 3/4" moisture resistant solid wood core with High Pressure Laminate (HPL) finish on both sides and full perimter black drive in Tmolding trim. Straight cut (no countours) is standard. Door assembly includes the original Easy Swing® hinges installed on black powder coated freestanding gate post. (FO Height Minimum 24", For Maximum see table: Post Height Maximum 54") INSTALLATION DETAILS: No Jamb needed for installation. Fasteners to mount to concrete floor included.



Specify Laminate:	
Additional Specifications:	
APPROVED BY:	DATE:

**Eliason Corporation - Senneca Holdings**