


# ORDER FROM

Quote/Order# \_\_\_\_\_  
 Attention: \_\_\_\_\_  
 Phone#: \_\_\_\_\_

Company Name: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Job Name: \_\_\_\_\_

Fill Out the dimensions below referenced from the top of the existing door frame. Start with the frame height (A), lockset location (B, from bottom of frame), and frame width (C). then fill in the applicable number of hinge locations from the top of the frame (Max 6).

A: \_\_\_\_\_ B: \_\_\_\_\_ C: \_\_\_\_\_  
 D: \_\_\_\_\_ E: \_\_\_\_\_ F: \_\_\_\_\_  
 G: \_\_\_\_\_ H: \_\_\_\_\_ I: \_\_\_\_\_

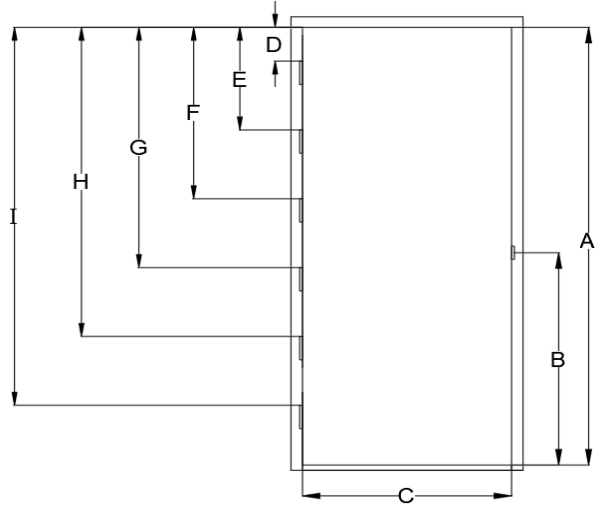

**Fill in Opening Size in the Blanks Provided Above**



**STANDARD SPECIFICATIONS:** Door body 1.750" thick hardwood skinned particle board with .032" HPL skins on both faces and face matching HPL edge banding. Three degree beveled leading swing edge. Door come prepped for lockset installation at ordered height.

**Installation Details:** See installation instructions for individual components supplied by customer.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

**HINGE PREP:**

- STANDARD HINGES (FILL OUT DIMENSIONS ABOVE)  1/4" UNDERSIZE FULL MORTISE CONTINUOUS HINGE
- HEAVY WEIGHT HINGE (FILL OUT DIMENSIONS ABOVE)  5/16" UNDERSIZE FULL MORTISE CONTINUOUS HINGE

LOCKSET PREP TYPE:  Push-Pull Handle  161 PREP  161 TURTLE PREP  160 PREP SPECIFIED MANUFACTURER \_\_\_\_\_

HANDING:  LEFT HAND  RIGHT HAND  LEFT HAND REVERSE  RIGHT HAND REVERSE \_\_\_\_\_

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_