



INDUSTRIAL APPLICATION SOLUTIONS

PRODUCT BROCHURE



1

TRAFFIC DOORS

COMMON APPLICATIONS:
Sales to Back Room, Break Room, Food Prep Areas, Offices, Walk-In Coolers

2



COLD STORAGE DOORS / FIXED WINDOWS

COMMON APPLICATIONS:
Walk-in Coolers & Freezers, Loading Docks

3



AIR BARRIERS

COMMON APPLICATIONS:
Front Entrance, Loading Docks, Entry / Exit, Walk-in Coolers

4



FIBERGLASS DOORS

COMMON APPLICATIONS:
Restrooms, Pharmacy, Break Rooms, Entry / Exit, Exterior Fire Doors, Fire Corridor, Electrical Room

5



ROLL-UP DOORS

COMMON APPLICATIONS:
Sales to Back Room, Loading Docks, Secondary Entry / Exit, Walk-In Coolers

6



STRIP DOORS / INDUSTRIAL CURTAINS

COMMON APPLICATIONS:
Stock Room, Back Area, Open Coolers, Offices

7



FOUR-FOLD DOORS

COMMON APPLICATIONS:
Parking, Transit, Security, Fire Station, Agriculture, Retail & Commercial, Industrial, Tornado / Hurricane / Blast

8



SLIDING FIRE DOORS

COMMON APPLICATIONS:
Stock Room, Electrical Room, Back Area



INDUSTRIAL DOORS

Whether it's a traffic door, air barrier, roll-up door, fiberglass door, cold storage door and more, Senneca Holdings has your entire industrial application covered when it comes to door openings.

Keep bugs and debris out by installing an Enershield Air Barrier above your secondary entry doors. Install double acting traffic doors to allow for ease-of-access for your employees. Durashield roll-up doors are perfect for allowing sunlight and ventilation into your back dock area, while deterring insects and debris.

Have questions? Please contact your local sales representative or call us at:

800.543.4455.

BROCHURE KEY:



FREEZER APPLICATION



COOLER APPLICATION



WASHDOWN APPLICATION



NSF CERTIFIED



Chase Doors AirGard 973 shown in stock room application.



Chase Doors®

AIRGARD ECONOCLEAR®


TRAFFIC: Pedestrian, Push Cart
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Cooler, Freezer,
DOOR BODY: .120" clear PVC vinyl
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Low Temperature or Anti-Static PVC material, impact plates
***only to be used as a secondary door in cold storage applications.**



Chase Doors®

POLAR-PRO®

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Cooler, Freezer, Washdown
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Cooler, Freezer (to -20°F only), Washdown
DOOR BODY: .080" thick USDA-Grade clear low temp PVC vinyl
HINGE: Spring Hinge System
AVAILABLE OPTIONS: .120" thick USDA-Grade Clear Low Temp PVC, 30" tall gray or clear impact plates (on both sides)
***only to be used as a secondary door in cold storage applications.**

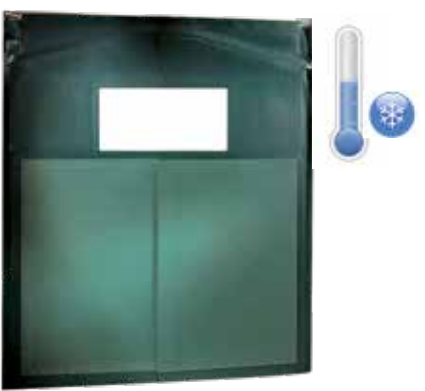

Chase Doors®

AIRGARD® 100

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Retail & Supermarket, Cooler, Freezer
DOOR BODY: 45 oz. abrasion-resistant, vinyl coated nylon material, flexible stays (one row per panel), top / bottom / jamb side wipers, 3" center overlap.
WINDOW: 30" x 14" window.
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Window Options, Impact Plates / Pocket Weights, Hinge & Color Options
***only to be used as a secondary door in cold storage applications.**



 Chase Doors®

AIRGARD® 200

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Retail & Supermarket, Cooler*
DOOR BODY: Constructed of two layers of abrasion-resistant, textured PVC laminated back to back, two rows of flexible horizontal stays, 3" center overlap, balloon jamb edge seals, top and bottom wipers.
WINDOW: Type 50, centered in each panel
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Window Options, Impact / Kick Plates, Hinge & Color Options
***only to be used as a secondary door in cold storage applications.**



 Chase Doors®

AIRGARD® UNI-FLEX 240

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Retail & Supermarket, Cooler & Freezer*
DOOR BODY: Constructed of two layers of .120" laminated PVC with a total thickness of .240", embossed finish, 3" center overlap
WINDOW: Type 50 centered in each panel
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Window Options
***only to be used as a secondary door in cold storage applications.**



 Chase Doors®

AIRGARD® 300

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Retail & Supermarket, Cooler & Freezer*
DOOR BODY: Constructed of layers of bonded two-ply "belting" material, two rows of flexible horizontal stays, low temp applications to -30°F, 3" center overlap, 2" balloon jamb edge seals, top and bottom wipers, Forest Green only.
WINDOW: Type 50, centered in each panel
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Window Options, Impact / Kick Plates, Hinge Options
***only to be used as a secondary door in cold storage applications.**



MEGA-PRO

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: *Interior Applications Only - up to 10' x 10'.* Light Industrial, Commercial, Retail & Supermarket, Cooler & Freezer*, Washdown
DOOR BODY: .160" thick Clear Low Temp PVC and Galvanized Steel Universal Mounting Hardware (In-Jamb or Face-of-Wall)
HINGE: Spring Hinge System, Bottom Breakaway Hinges
AVAILABLE OPTIONS: .240" thick Clear PVC, .275" thick Clear PVC, .275" thick Low Temp Clear PVC, 48" tall black Impact Plates (on both sides)
***only to be used as a secondary door in cold storage applications.**



 Chase Doors®

AIRGARD® 973

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Retail & Supermarket, Cooler*
DOOR BODY: Constructed with a .160" thick PVC door body and a two-ply vinyl coated nylon bracket pocket. 3" overlap at the center on bi-parting doors provides a noise and temperature barrier. 48" high USDA accepted textured vinyl impact plates (both sides).
WINDOW: Extra large viewing area
HINGE: Top Mounted Gravity Hinge
AVAILABLE OPTIONS: Window Options, Impact / Kick Plates, Hinge & Color Options
***only to be used as a secondary door in cold storage applications.**



AirGard 973 Single Panel shown above.



 Chase Doors®

DURULITE® INDUSTRIAL

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Retail & Supermarket, Industrial & Commercial, Cooler & Freezer*, Washdown
DOOR BODY: 1-7/8" Overall thickness, 1/4" thick rotationally molded polyethylene skin retains properties to -40°F, leading & back edge internal reinforcement & gasket
WINDOW: 1/8" polycarbonate, black frame.
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: 180° x 90° Hardware, Teardrop Bumpers, Impact / Kick Plates, Lower Hinge Guards, Spring Assist, Locking Devices, Window Options
OTHER: NSF Certified
***only to be used as a secondary door in freezer applications.**



Durulite Industrial shown in warehouse / industrial setting.



 Chase Doors®

DURULITE® RETAILER

TRAFFIC: Pedestrian & Push Cart
APPLICATIONS: Kitchen & Restaurant, Industrial & Commercial, Cooler
DOOR BODY: Panel thickness is 1-1/2", skin thickness is 1/8". Rotationally molded polyethylene outer skin retains properties to -40°F.
WINDOW: Large Polycarbonate, black PVC frame.
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: Window options, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, SlideTrac Bumpers™
OTHER: NSF Certified



 Chase Doors®

DURULITE® RETAILER R25D

TRAFFIC: Pedestrian, Push Cart, Pallet Jack
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Cooler
DOOR BODY: 1/8" thick high-density rotationally molded polyethylene and Non-CFC urethane foam core. Replaceable perimeter edge gasketing, full height backspine.
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: Window Options, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, Locking Devices, 180° x 90° Hardware, SlideTrac Bumpers™
OTHER: DOE Compliant



 Chase Doors®

DURULITE® RETAILER XHD

TRAFFIC: Pedestrian & Push Cart
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Cooler, Washdown
DOOR BODY: 1-1/2" overall panel thickness, Non-CFC urethane foam core, rotationally molded polyethylene outer skin thickness is 1/8" and retains properties to -40°F. Replaceable perimeter edge gasketing and a 1" diameter hinge post molded into door (full length). Reinforced leading edge aluminum extrusion.
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: Partial Door Gasketing, Window Options, Impact / Kick Plates, Teardrop Bumpers, Locking Devices, Cart Guards, SlideTrac Bumpers™
OTHER: NSF Certified



Chase Doors®

DURULITE® STANDARD

TRAFFIC: Pedestrian, Push Cart, Pallet Jack
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Cooler, Freezer*, Washdown
DOOR BODY: 1-7/8" overall panel thickness, 1/8" rotationally molded polyethylene outer skin thickness and retains properties to -40°F. Non-CFC urethane foam core, leading and back edge Internal reinforcement, gasketing.
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: Lower Hinge Guards, Window Options, Impact / Kick Plates, Teardrop Bumpers, 180° x 90° Hardware, Spring Assist, Locking Devices
OTHER: NSF Certified
***only to be used as a secondary door in freezer applications.**



Chase Doors®

PROLINE 300 / 400

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Retail & Supermarket, Industrial & Commercial, Cooler
DOOR BODY: Wood Core, 1-1/2" thick (insulated, with foam), 3/4" thick (non-insulated), steel spine reinforcement, full perimeter replaceable bulb gaskets.
WINDOW: Single panel 1/8" thick polycarbonate (for wood core), double pain (insulated)
HINGE: V-Cam Hinge System
AVAILABLE OPTIONS: Window options, Lower Hinge Guards, Impact / Kick Plates, Teardrop Bumpers, Cart Guards, Insulated / Non Insulated, Partially Gasketed Doors



ELIASON®

HCP-10 / HCG-10

TRAFFIC: Pedestrian, Push Cart, Pallet Jack
APPLICATIONS: Retail & Supermarket, Industrial & Commercial
DOOR BODY: Urethane foam core with a high strength structural PVC frame, 1-1/2" total door thickness, High-impact thermoplastic exterior, 18" high teardrop Bumpers (both sides).
WINDOW: 14" x 16" clear acrylic, double glazed set in black rubber molding
HINGE: Eliason Easy Swing® Hinge
AVAILABLE OPTIONS: 24" high scuff plate (both sides), perimeter seal
OTHER: Model HCP-10N only is NSF Certified



ELIASON®

P-11 PLUS

TRAFFIC: Pedestrian, Push Cart
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial
DOOR BODY: High strength polymer cell core with 1/2" PVC frame, 5/8" total door thickness, high impact thermoplastic exterior, galvanized steel powder coated satin black.
WINDOW: 14" x 16" clear acrylic set in black rubber molding.
HINGE: Eliason Easy Swing® Hinge
AVAILABLE OPTIONS: 9" x 30" ADA-Compliant Windows



Saino Easy Roll Hardware System.



Saino®

SAINO® SERIES 3000

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial
DOOR BODY: Modular panel construction, Kraft honeycomb core bonded to 20 gauge cold rolled face sheets and 18 gauge interior framing channels. Heavy-duty 14 gauge capping channel and a 10 gauge bottom guide roller channel. Equipped with a weight or reel type closing system, 2" x 2" x 3/8" angle track system, 5-1/4" diameter wheels and thru wall linkage. Automatic close system is standard with thermal heat detectors and Easy Roll hardware system.
OTHER: All hardware is prime painted. All Sliding Fire Doors are UL Listed & Labeled.
AVAILABLE OPTIONS: Optional Galvanized prime painted or stainless steel finishes, Control Speed Closing option, Single Slide or Center Parting



Saino®

SAINO® SERIES 3100

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Retail & Supermarket, Industrial & Commercial
DOOR BODY: Modular panel construction with Kraft honeycomb core, bonded to 20 gauge cold rolled face sheets and 18 gauge interior framing channels. Panels over 52" wide are connected with surface applied splice plates. Panels assembled with heavy-duty 14 gauge capping channel and 10 gauge bottom guide roller channel. Prime painted with rust resistant paint. Equipped with Easy Roll Hardware System. Consists of 2" x 2" x 3/8" angle track, heavy-duty hangers with 3/8" x 3-1/2" hanger frames, 5-1/4" diameter wheels and precision ball bearings. Track door can be motorized without additional track hardware.
OTHER: All Sliding Fire Doors are UL Listed & Labeled.
AVAILABLE OPTIONS: Optional Galvanized prime painted or stainless steel finishes, Control Speed Closing option, Single Slide or Center Parting.



Saino 3100 shown in an interior warehouse application.



SAVE-T® LAMINATED RUBBER BUMPERS

OVERVIEW: This most common style is constructed of recycled truck tire pads compressed between steel angles and secured with 3/4" steel tie rods. Protects both trucks and docks. Standard sizes available from 4-1/2" to 12" thick in horizontal, vertical, extra-length and extra-thick styles. Gussets for lower docks and special sizes also available.



SAVE-T® STEEL FACED BUMPERS

OVERVIEW: Should be used where maximum protection is desired. 3/8" thick steel front plate. Will absorb more shock and abrasion and will absorb the constant height adjustment of air ride trailers. Standard sizes available from 4-1/4" to 12-3/4" thick. Gussets for lower docks and special sizes available.



SAVE-T® MOLDED RUBBER BUMPERS

OVERVIEW: Manufactured using reinforced rubber in a variety of shapes and sizes. These solid, durable, one piece bumpers are smooth, attractive and will not harden or be affected by weather. Most popular models are the "T", "L", and "R" styles. Listed & Labeled



SAVE-T® POLYCARBONATE INCANDESCENT DOCK LIGHTS

OVERVIEW: High-impact polycarbonate construction offers 50% less weight than traditional metal heads, with outstanding durability. Light heads won't rust, dent or bend and stay cool to the touch. Uses PAR 38 or R 40 bulb to 150 watts maximum.



SAVE-T® POLYCARBONATE DOCK LIGHTS

OVERVIEW: The Tri-Lite DL40-P has a 40" double strut arm. This cool-to-the-touch head is very durable and very affordable. Single strut arm and metal head are available.



SAVE-T® STOP & GO COMMUNICATION LIGHTS

OVERVIEW: Tri-Lite Stop & Go lights alert personnel that a truck has been safely docked. These are available in incandescent, LED and low voltage light types.



SAVE-T® EXTRUDED BUMPERS

OVERVIEW: Ideal when wall protection from forklifts and other dock equipment is needed, also great for indoor parking areas and marinas. Available in any length up to 10' and can have holes pre-drilled at the factory. Common styles include the "D" and "E" shapes.



SAVE-T® WHEEL CHOCKS

OVERVIEW: Available in laminated rubber, molded rubber, urethane and aluminum. Can be purchased with standard chain lengths of 10', 12' and 15'. Safety security signs are also available.
OTHER: OSHA Regulation 1910.78(M) - Wheel chocks must be used in addition to a trailer stand while trailer is docked.



SAVE-T® DOOR TRACK GUARDS

OVERVIEW: Made of heavy-duty 7 gauge steel, they absorb impact from forklifts and other vehicles. Track guards bolt to the floor and the wall for firm attachment. Wraps around door track without interfering with door operation. 45 degree angle flange, 1/4" thick floor plate drilled for (3) 1/2" anchors, 3/16" thick wall flange drilled for (3) 1/2" anchors, 7-1/4" projection. Stocked in 36" (DTG 36) and 48" (DTG 48) sections.



SAVE-T® EZ-RISER TRAILER STANDS

OVERVIEW: Exclusive gas-activated leveling system with security pin, 100,000 lbs static load capacity, height adjustable from 36" to 48", 5" x 30" support pad, extra large 17" x 18.5" base, large 16" pneumatic rubber tires. Only one is required per trailer. The weight of the EZ-Riser is 200 lbs. and has a one year limited warranty.



SAVE-T® AUTO-RISER TRAILER STANDS

OVERVIEW: Exclusive gas-activated leveling system with security pin, 100,000 lbs static load capacity, height adjustable from 42" to 52.5", 5" x 30" support pad, extra large 17" x 18.5" base, 10" semi-pneumatic rubber tires. Only one is required per trailer. The weight of the Auto-Riser is 150 lbs. and has a one year limited warranty.




SAVE-T® RATCHET-RISER TRAILER STANDS

OVERVIEW: 38" ratcheting / positioning handle, 100,000 lbs. static load capacity, 40,000 lbs. lifting capacity, height adjustable from 39.5" to 51", large circular base, 10" semi-pneumatic rubber tires. Two are recommended per trailer. The weight of the Ratchet-Riser is 105 lbs. and has a one year limited warranty.



SAVE-T® LED DOCK LIGHT HEADS

OVERVIEW: Made using a PAR 38 LED bulb with a choice of single or double strut arms. Head diameter is 8". Comes in an Ultra Heavy-Duty model. Optional fans and secure wire guards are available.

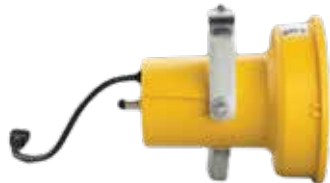

SAVE-T® POLYMER DOCKLITE® HEADS

OVERVIEW: Has a cool-to-the-touch head that deflects and dissipates heat and prevents denting. The head diameter is 8". Compatible with standard Phoenix arms.



SAVE-T® FLUORESCENT DOCKLITE® HEADS

OVERVIEW: Allows up to 75% energy savings each year. The cool-to-the-touch light head is also impact resistant. Energy rebates may be available. The head diameter is 8". Compatible with standard Phoenix arms.



SAVE-T® PARKING BLOCKS & SPEED BUMPS

OVERVIEW: Made of rugged, high density polyethylene. They're flexible, light weight, affordable, and never need to be painted. They feature a non-skid surface, weather and chemical resistant, and are load tested to 20,000 lbs. per pneumatic tire. Mounting hardware is included.



SAVE-T® RECYCLED PLASTIC PARKING BLOCK & SPEED BUMPS

OVERVIEW: Solid parking blocks that are virtually indestructible and maintenance free. They carry a lifetime warranty.



SAVE-T® BOLLARD POSTS & MACHINE GUARDS

OVERVIEW: Bollard Posts prevent damage to doorways, racking or corners. Postcaps can be removed for filling. Machine Guards provide protection for equipment and machinery and can create barriers between traffic areas.



**SAVE-T® BOLLARD
POST SLEEVES**

OVERVIEW: Post Sleeves make old bollards look new. They eliminate costly repairs due to chipping, rusting, cracking or discoloration. Sleeves are 56" long and can be trimmed to fit existing posts. Yellow is standard, additional colors are available.



**SAVE-T®
COLUMN PROTECTORS**

OVERVIEW: High density polyethylene protectors absorb impact and prevent damage and repair charges to columns, forklifts, equipment and personnel. Two halves attach together with easy-to-use Velcro straps and require no tools. Each protector is maintenance free, light weight and UV protected. Other high-visibility colors are available.



**SAVE-T®
WALL PROTECTORS**

OVERVIEW: Each high density polyethylene protector is impact resistant, light weight and resistant to cracking and chipping. (Anchors not provided).



**SAVE-T®
CORNER PROTECTORS**

OVERVIEW: Corner Protectors deflect impact and protect plant areas prone to damage by forklift, hand truck or personnel traffic. They can be mounted to protect racks or lightweight corner protector is UV stabilized.



**SAVE-T® PORTABLE POLY
DOCK PLATE**

OVERVIEW: Available in laminated rubber, molded rubber, urethane and aluminum. Can be purchased with standard chain lengths of 10', 12' and 15'. Safety security signs are also available.
OTHER: OSHA Regulation 1910.78(M) - Wheel chocks must be used in addition to a trailer stand while trailer is docked.



**SAVE-T® PORTABLE POLY
CURB RAMP**

OVERVIEW: Made of heavy-duty 7 gauge steel, they absorb impact from forklifts and other vehicles. Track guards bolt to the floor and the wall for firm attachment. Wraps around door track without interfering with door operation. 45 degree angle flange, 1/4" thick floor plate drilled for (3) 1/2" anchors, 3/16" thick wall flange drilled for (3) 1/2" anchors, 7-1/4" projection. Stocked in 36" (DTC 36) and 48" (DTC 48) sections.



TMI Save-T® Security Gate in garage application.



SAVE-T® SECURITY GATES

OVERVIEW: Constructed of 14 gauge steel with gray polyurethane finish, steel uprights with steel casters and drop pins. Single and double gate models are available. Extension brackets available for mounting around existing garage door. This is a Quick-Ship item (ships in 1-2 days).



SAVE-T® STORAGE CABINETS

OVERVIEW: Made of 18 gauge steel and are designed to protect contained flammable liquids for a period of 10 minutes, giving employees times to exit a building in case of a fire. Each cabinet has adjustable shelves to accommodate various container sizes. Meet NFPA Code 30 and OSHA specifications.



TMI Save-T® Storage Cabinet shown in a larger size.



CHEM-PRUF FIBERGLASS

TRAFFIC: Pedestrian
APPLICATIONS: Restaurant, Retail & Supermarket, Pharmaceutical, Food Processing, Industrial, Clean Room, Corrosive
DOOR BODY: 25 mils of resin-rich gelcoat surface, .125" thick integrally molded plates, one-piece cast in-place stile and rail system, polypropylene honeycomb core is standard.
AVAILABLE OPTIONS: Window Options, Lite Kit Options, Polyisocyanurate Foam, or Mineral Cores, Gelcoated Fiberglass Reinforced Accessories and High Quality Stainless Steel Hardware



TIGER DOOR FIBERGLASS

TRAFFIC: Pedestrian
APPLICATIONS: Restaurant, Retail & Supermarket, Pharmaceutical, Food Processing, Industrial, Clean Room, Corrosive
DOOR BODY: In-Mold 25-30 mil gelcoat with Urethane Topcoat Finish supported by a muscular bi-axial glass fiber structural reinforcement layer. Resin Impregnated Honeycomb core is standard.
AVAILABLE OPTIONS: Window Options, Lite Kit Options, Polypropylene Honeycomb Core, Gypsum Mineral Core, Polyisocyanurate Foam Core, Thresholds, Door Sweeps, Door Louvers, Weatherstrips and Gaskets, Astragals, Frame Options



Tiger Fiberglass Door shown in corridor application.



INDUSTRIAL CURTAINS

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, forklift
APPLICATIONS: Retail & Supermarket, Industrial, Food Processing, Distribution
DOOR BODY: 18 oz. material with a top reinforced sewn hem with stainless steel grommets available in 12", 18" or 24" increments.
AVAILABLE OPTIONS: Window Options Available, Optional Track System, Various Color Options



INSULATED CURTAINS

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift, Vehicle
APPLICATIONS: Retail & Supermarket, Food Processing, Industrial, Distribution, Cold Storage
DOOR BODY: 18 oz. vinyl coated polyester fabric material and an inner core of single or double ply double bubble insulation. Each wall made of 54" wide panels
AVAILABLE OPTIONS: Window Options, Bottom Hem for pipe or chain, Glued Adhesive, Track and Trolley Hardware, Vertical Stiffener Pockets, Cut Out Reinforced Hand Pulls, 6" Floor Sweep



STRIP DOORS

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Kitchen & Restaurant, Retail & Supermarket, Industrial & Commercial, Cooler & Freezer
DOOR BODY: Strip PVC material of choice, various bracket choices available.
BRACKET OPTIONS: Threaded Stud variations, TMI Loc variations, Standard and Heavy Duty Overhead
MATERIAL OPTIONS: Standard Clear PVC, Low Temp, Reinforced, Extra Low Temp, Offset Double Ribbed variations, Opaque Black and White, Anti-Static, Weld Screen and Safety Orange.



TMI Bug Screen Roll-Up Door shown in loading dock application.



ROLL-UP DOORS

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, forklift
APPLICATIONS: Retail & Supermarket, Industrial, Manufacturing
DOOR BODY: Constructed with your choice of Bug or Bird Screen, Solid Vinyl or Wire Mesh. Can be placed on the inside or outside of a building and can be mounted either in jamb, on the face of wall, or with standoff brackets.
AVAILABLE OPTIONS: Manual or Motor Operation, Sliding Doors, Bug or Bird Screen material, Solid Vinyl material, Wire Mesh material



AIR BARRIERS

TRAFFIC: Pedestrian, Push Cart, Pallet Jack, Forklift
APPLICATIONS: Industrial & Commercial, Cold Storage, Distribution, Shipping & Receiving, Service Bays, Retail & Supermarket
CONSTRUCTION: Galvanized steel exterior with finish painted components, control panel for automatic activation upon door opening is included. Lengths vary from 4' to 45'. Standard voltage varies per unit type.
OTHER: Enhanced UL Certification Mark, US - CA
AVAILABLE OPTIONS: Various Lengths available, Various Voltages, Vertical and Horizontal Mounting Options.



Enershield Air Barrier shown in Cold Storage Cooler Application.

OTHER INDUSTRIES SERVED:



SUPERMARKETS / GROCERY STORES



RETAIL



INDUSTRIAL



COMMERCIAL



KITCHEN



RESTAURANT

In our continuing effort to improve, some information may change. We reserve the right to make changes without notice or recourse.



SENNECA HOLDINGS
11502 CENTURY BOULEVARD, CINCINNATI, OH 45246
WWW.SENNECA.COM | QUOTES-ORDERS@SENNECA.COM | 800.543.4455

BROCHURE #: SENIND1220