

# ClearCool® 3400/3500

## Welded Sliding Door

Environmentally-Friendly Deli Sliding Door System



Thermoseal's patent-pending **ClearCool® 3400/3500** sliding door systems combine thermally-efficient, low-conductivity PVC extrusion profiles and design features to exceed the demanding requirements of a non-refrigerated deli or confectionary display case door with monolithic 5.0 mm glass versus an insulating glass unit. Available for flush-mount case applications, the ClearCool® 3400/3500 sliding door systems are manufactured with state-of-the-art, low-conductivity PVC extrusion profiles for superior thermal performance.



**THERMOSEAL®**

[www.thermoseal.com](http://www.thermoseal.com)

# ClearCool® 3400/3500

## Welded Sliding Door

Environmentally-Friendly Deli Sliding Door System



The **ClearCool® 3400/3500** sliding door systems are designed for long-lasting durability. The corners have welded miter joints which are stronger than underlying extrusions, and which require no mechanical fasteners to assemble the doors, so installation is quick and easy, and there are no fasteners to loosen and allow unsightly open miter joints to occur.


- Specify ClearCool® 3400 when self-closing is required, utilizing sealed steel ball bearing wheel assemblies.
- Specify ClearCool® 3500 when manual closing is desired, utilizing smooth-riding, long-lasting, low-friction injection-molded glide blocks.

### FEATURES:

- Low-conductivity PVC extrusion profiles for superior thermal performance.
- Welded PVC corners provide additional strength and rigidity for long-lasting durability.
- Monolithic tempered glass for maximum safety.
- Patent-Pending design reduces condensation and energy consumption.
- RoHS-compliant.
- Field-replaceable wear components, including glass, hardware and gasket components.
- Inserts 2.08" into cabinet.
- Flush-mount frames are standard in black or battleship gray.
- NSF/ETL tested and approved.

### OPTIONS:

- Self-closing or manual-closing options.
- Hold-open option available for self-closing doors.
- Keyed lock and keeper.
- Multiple glass configurations available in 5.0 mm tempered glass.
- Other PVC colors available with sufficient volume.

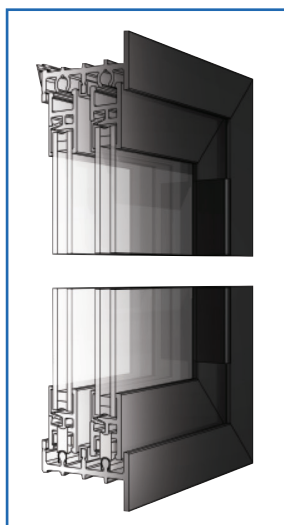

**Thermoseal Industries, LLC**

600 Jersey Avenue | Gloucester City, NJ 08030  
www.thermoseal.com | info@thermoseal.com

**800-456-7788 | 856-456-3109 | fax 856-456-0989**