

THERMOSEAL PUREVIEW LED

REFRIGERATOR DOOR LIGHT

Product Highlights

- Highest efficacy in the industry - 119 lumens-per-watt @ 18 (system watts)
- Highest lumens on center in the industry - 2000 lm
- Best-in-class Uniformity - 1.1:1
- 90 CRI, R9 68Min
- 100,000 hours L70
- Patented coined optic reflector for uniformity & heat management benefits
- Fully concealed LED emitters for exceptional visual comfort



PRODUCT SPECIFICATIONS

CRI
90

Color Temperature
4000K

Ambient Operating Temp
Min -20°F, Max 104°F

Frame
Shatter proof metal guard

Finish
White Powder Coat

Certification
UL, ULC, DLC, ROHS, NSF

Uniformity
1:1;1 6 inch mounting distance

Dimmable
Dimmable via 0-10V CV LED Driver

R9 Value
82.1

L70 life
100,000 Hours

Reflector
Patented Zero Glare Coined Optic

LED
Mid power LED

Driver Specifications
Input Voltage 24VDC +/- .5VDC

Fixture Watts
End fixture 9watts, Center fixture 18watts

Lead Wire
12" 18 GA (AWG) 300V - Overcoat



IP65 Rating

Made in U.S.A.


Warranty 5 year



PRODUCT DETAILS

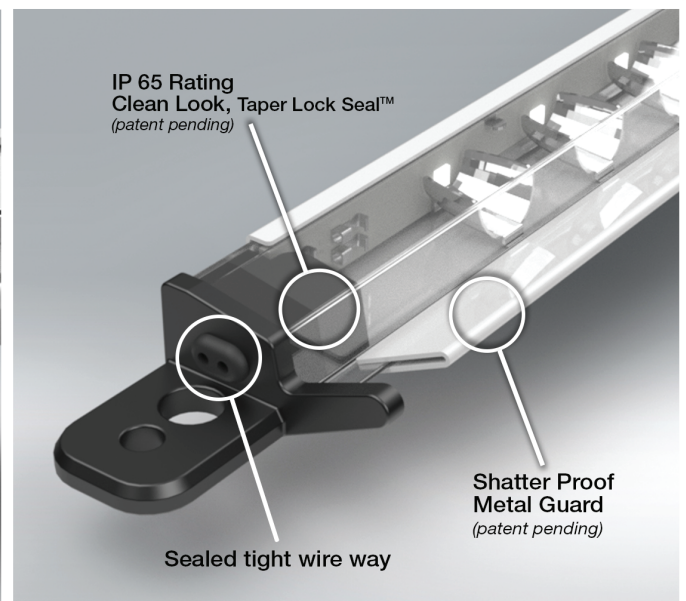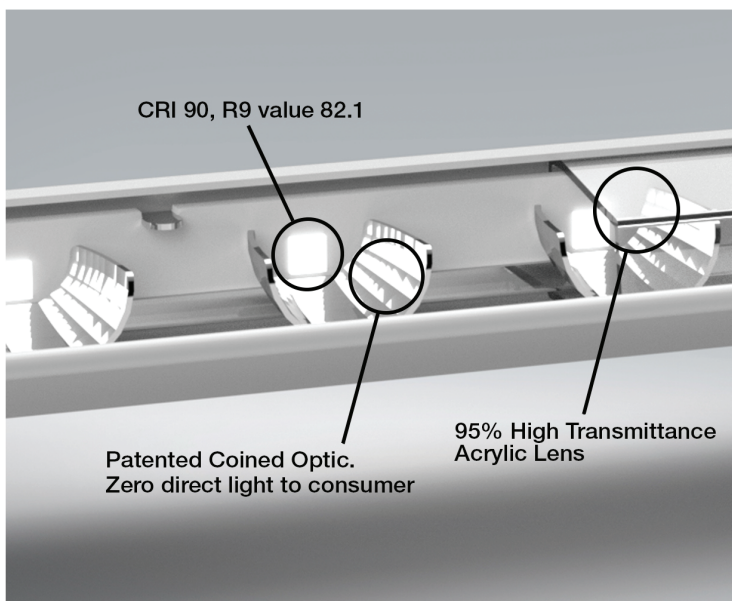

Technical Drawings

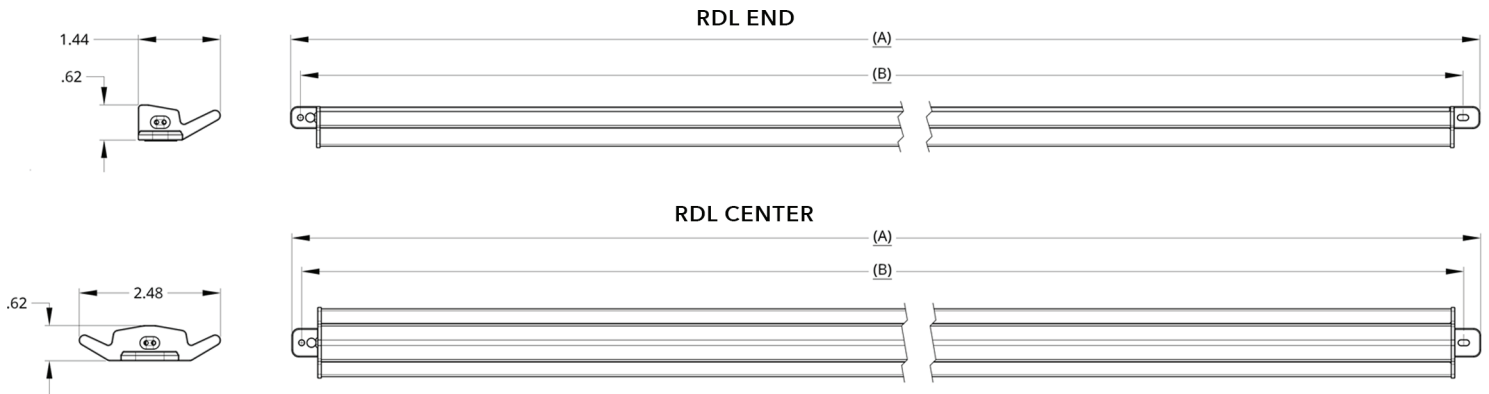

PURE VIEW RDL END PRODUCT		
PART DISCRIPTION	OVER ALL LENGTH (A)	MOUNTING (B)
PRRD-L8-E	69.06	68.13

PURE VIEW RDL CENTER PRODUCT		
PART DISCRIPTION	OVER ALL LENGTH (A)	MOUNTING (B)
PRRD-L8-C	69.06	68.13

PURE VIEW RDL POWER						
Part Number	Description	Power	Lumens	LPW	CRI	R9
PV-RDL-L8-C-4000K-90-18W	72" Center Fixture	18.10	2176	118.9	94.6	81.90
PV-RDL-L8-L-4000K-90-9W	72" Left End Fixture	9.17	1072	118.1	94.4	80.00
PV-RDL-L8-R-4000K-90-9W	72" Right End Fixture	9.17	1072	118.1	94.4	80.00



SENNECA HOLDINGS

11502 CENTURY BOULEVARD CINCINNATI, OH 45246

WWW.SENNECA.COM

BROCHURE #: THERMLEDLIGHT-1120