

Four-Fold

Aesthetic appeal of the Four-Fold door will have your dealership standing out from the rest. These doors can be designed and manufactured specifically to fit the needs of your dealership. Having a one-of-a-kind door in your dealership not only makes you unique but distinguishes your dealership from the competition.

SUPERIOR PERFORMANCE

- Function under high cycle and other severe conditions
- Energy efficient

Designed and tested for over 1 million cycles

SPEED

- Four-Fold doors clear the opening at an average speed of 24 inches per second
- Reduces wait time

 High-speed operation of the Four-Fold door minimizes heating and cooling losses

MAINTENANCE

• Designed for minimal maintenance

HORIZONTAL MOVEMENT

Full visibility of door motion.

Unique, High-End Options

FEATURES

HIGH SPEED OPERATOR

- High-speed with high cycle durability
- Easy to operate
- Low maintenance

FULL PERIMETER SEALS

Keeps weather out

CUSTOMIZED PANEL LAYOUTS


 Choose from vision lites, grilles, decorative paneling, and wood/composite cladding



Opening to Your Standards.

CAR DEALERSHIP

Four-Fold

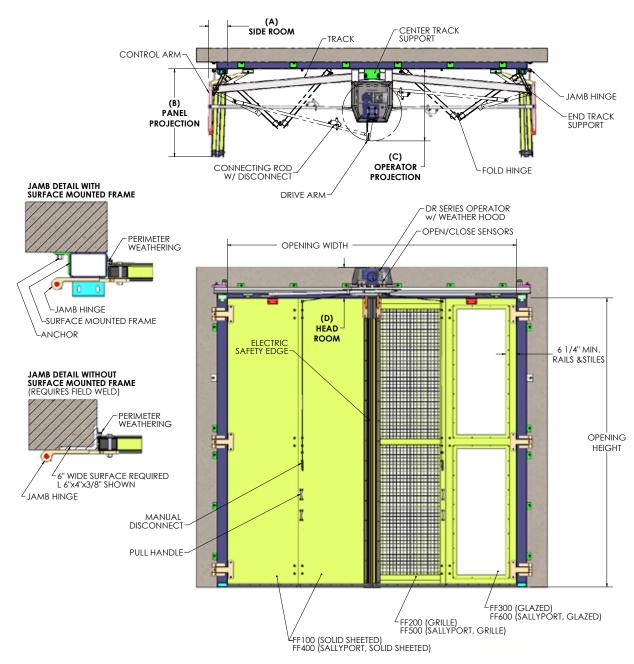

<u>FOUR-FOLD GENERAL LAYOUT</u> DR SERIES, ELECTRO-MECHANICAL

| OPENING WIDTHS | APPROX. CLEARANCES | | | | MAX TIME | MOTOR | OPERATOR |
|------------------|--------------------|----------|-------|-----|----------|-------|----------|
| OI LINING WIDTHS | Α | В | С | D | TO OPEN | HP | STYLE |
| 7'-6" to 10'-6" | 12" | 1/4 | 34.5" | 16" | 6.6 sec | 3/4 | DR1 |
| 10'-6" to 13'-6" | 12" | OPENING | 39" | 16" | 6.6 sec | 3/4 | DR2 |
| 13'-6" to 16'-0" | 12" | PLUS 12" | 42" | 16" | 6.6 sec | 3/4 | DR3 |
| 16'-0" to 17'-3" | 12" | WITHOUT | 42" | 16" | 10.6 sec | 3/4 | DR4 |
| 17'-3" to 23'-0" | 14" | FRAME | 57" | 16" | 13.2 sec | 1 | DR5 |

This layout is designed as a guide for required clearances for our typical Four-Fold Door Systems. Contact us to discuss the wide variety and options available for custom clearance requirements or nonstandard opening sizes.