

AIRGARD 300 ORDER FROM

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

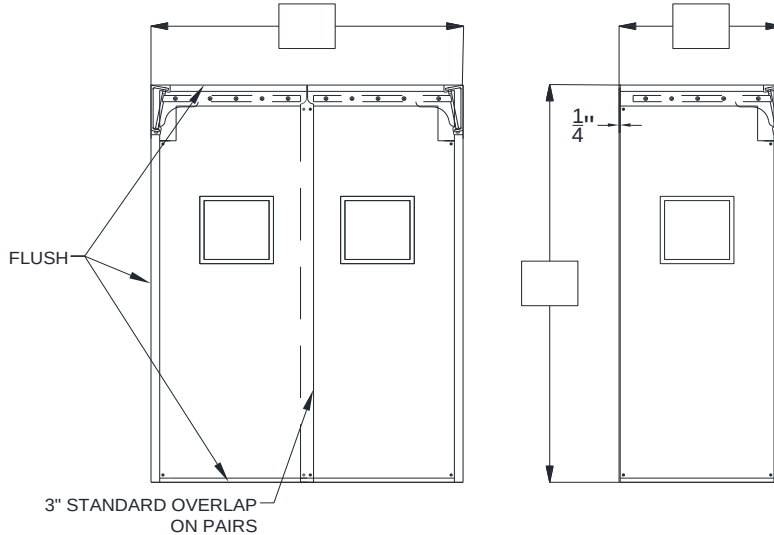

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body is made of 2 layers of .120 green belting. Window is 15" x 14" clear PVC. Door assembly consists of all panel components being glued together. Gasketing on the top, bottom, and jamb edges. Hardware is a wall-mounted bracket with stainless steel arm. Panel is through-bolted to arm with 1/4" hardware.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

HANDING: ☐ Left ☐ Right ☐ Pair

WINDOW: ☐ Standard 15" x 14" Clear PVC Window, 60" FFL ☐ 14" x 16" ☐ 22" x 22"
 ☐ 14" x 16" Visigard ☐ Other: _____

PLATE: Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 40 ☐ 42 ☐ 48

 Color/Material: ☐ ABS ☐ Polyolefin ☐ Texture PVC

PLATE COLOR: ☐ Black ☐ Colored (List of colors available upon request)

SPECIFIC DETAILS FOR DOOR SHIPMENT:

☐ Door to Be Skidded

☐ Door to Be Crated

OTHER SPECIFICATIONS: _____.

APPROVED BY: _____

DATE: _____

Chase Corporation