

# ECONOCLEAR ORDER FROM

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

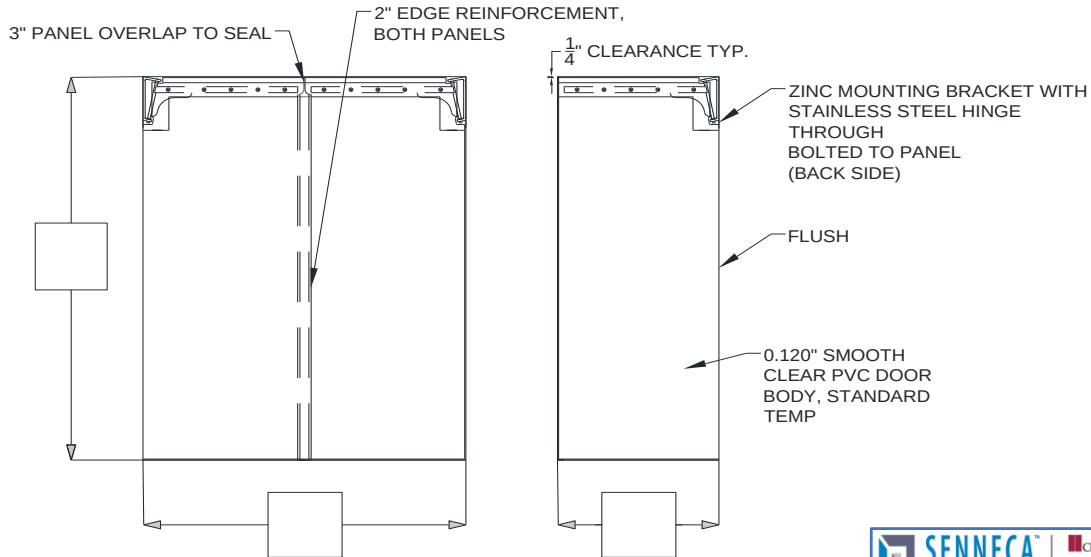

Fill in Opening Size in the Blanks Provided Above



**STANDARD SPECIFICATIONS:** Door body is made of 1 layer of .120 clear PVC. Door assembly consists of all panel components being glued together. Black 40 oz. reinforcement on both panels when made as a pair. Hardware is a wall-mounted bracket with stainless steel arm. Panel is through-bolted to arm with 1/4" hardware.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

## SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

HANDING: ☐ Left ☐ Right ☐ Pair

PANEL MATERIAL: ☐ Standard PVC ☐ Low Temp PVC

PLATE: Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 40 ☐ 42 ☐ 48

Color/Material: ☐ ABS ☐ Polyolefin ☐ Texture PVC

PLATE COLOR: ☐ Black ☐ Colored (List of colors available upon request)

## SPECIFIC DETAILS FOR DOOR SHIPMENT:

☐ Door to Be Skidded

☐ Door to Be Crated

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

Chase Corporation