

# ROLL-UP DOOR MEASUREMENT GUIDE

TMI ORDER # \_\_\_\_\_ DOOR NAME \_\_\_\_\_  
 Screen-Pro (SP) Vinyl-Pro (VP) Bird-Pro (BP)

## PART ONE (ALL DOOR STYLES)

### MOUNTING STYLE:

- In-Jamb (requires 4.5" on each side of jamb, 8.5" of head room and 8.5" of jamb depth)  
 Face of Wall  
 Inside Building Outside Building (protection recommended)  
 Inside Stand-Off  
 Full Vertical Lift or Vertical Lift Breakaway  
 Standard Lift / Low Headroom  
 High Lift  
 Coiling Steel (sits in front of existing steel box above door)  
 Coiling Steel (sits below existing steel box within opening)

### DOOR CONFIGURATION:


- Sliding Manual (single panel up to 10' w x 10' h, bi-parting over 10' w x 10' h)  
 Portable Frame Stationary Screen (PFSS)  
 Spring-Loaded Manual (Series 1000 | yellow pull down straps, max 12' w x 12' h)  
 Chain Hoist Manual (Series 2000 | maximum size: 14' w x 14' h)  
 Chain Hoist Side: Right (standard) Left  
 In-Tube Motorized (Series 3000 | 12" per second, maximum size: 14' w x 16' h)  
 Motor Side: Left (standard) Right  
 External Motor (maximum size: 14' w x 16' h)  
 Pro LH (Series 4000 | 12" per second, 10-15 cycles per hour)  
 Pro H (Series 5000 | 12" per second, 100 cycles per day)  
 Pro H36 (Series 6000 | 36" per second, 100 cycles per day)  
 Motor Side: Left (standard) Right

Standard Voltage | Optional Voltage (additional charges may apply)  
 115v (Single Phase) 230v (Single Phase) 460v (3 Phase)\*  
 208/230v (3 Phase)\* 575v (3 Phase)\*  
 \* Not available on Pro LH

### MATERIAL OPTIONS:

- Insect Screen (Screen-Pro)  
 Blue Yellow Black Green Other \_\_\_\_\_  
 Bird Mesh (Bird-Pro)  
 Black  
 18 or 22 oz. Vinyl\* (Vinyl-Pro)  
 Blue Black Green Red Other \_\_\_\_\_  
 40 oz. Vinyl\* (Vinyl-Pro)  
 Blue Black Red Green Other \_\_\_\_\_  
 \* Vinyl-Pro Only: Do you want a vision panel/window?  
 Yes No

## PART TWO (ALL DOOR STYLES)




All measurements should be in inches.  
 Doorway Width  
 W1 \_\_\_\_\_ W2 \_\_\_\_\_ W3 \_\_\_\_\_  
 Doorway Height  
 H1 \_\_\_\_\_ H2 \_\_\_\_\_


Measurements should be made **INDEPENDENTLY**.  
 (Do NOT assume W1 = W3.)

## PART THREE (INSIDE STAND-OFF MOUNT ONLY)

### DIMENSIONS:

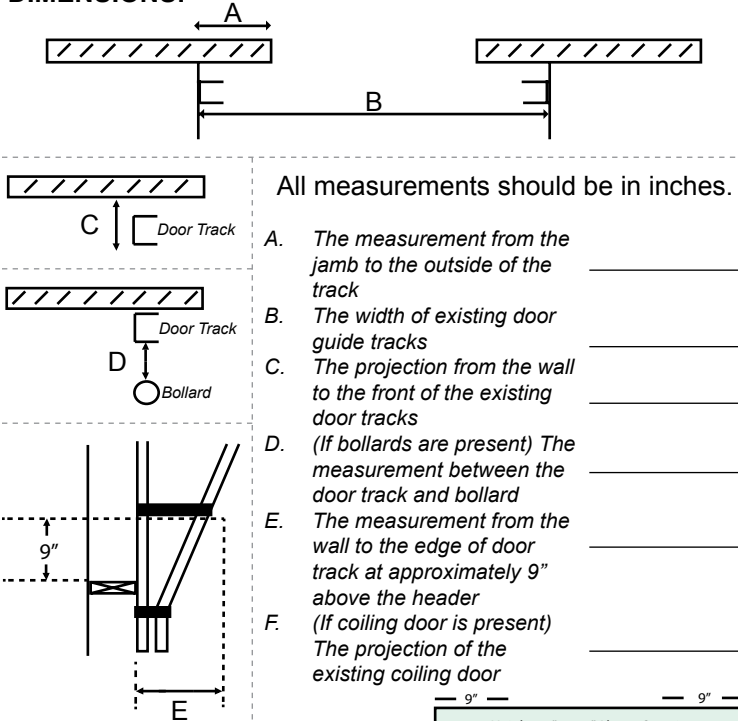

The illustration to the right shows the areas that need to be free from any obstacles to allow the door to operate properly.  
 If there are any obstructions in these areas, they must be removed.



### IMPORTANT PRODUCT AND APPLICATION INFORMATION:

- Each wind stiffener will have yellow accent safety stripes, and spring loaded doors will include yellow safety pull down straps.
- Please check for wind and negative pressure. If medium to high winds or negative pressure is present, consider upgrading to our high-wind package that includes an extra panel and stiffener (for an additional cost).
- If your door is being installed on a corrugated building, you may need additional mounting reinforcements (supplied by others).
- Inside stand-off mounted doors do not include a method of sealing an open gap that may exist between the wall and your existing door. Please ask your local installer to supply brush or weatherseal if required.
- When used as a Vinyl-Pro, these doors are designed to be a barrier against bugs, birds, temperature and other elements in **interior** environments. They do not carry a wind load rating. If mounted outside, use discretion and make sure the existing sectional or rolling steel door is closed and the roll-up door is up during windy conditions.
- Any variations to the door size from what was quoted may change the price of the door.

### Application Notes:

SIGNATURE  
REQUIRED

This door measurement guide needs to be filled out completely before the order can be entered. Charges will be assumed by buyer for changes or cancellations to work in progress. Buyer hereby accepts responsibility for all sizes, dimensions, and door options specified above. **This order will not be processed until door measurement guide is signed and submitted.**



DATE \_\_\_\_\_

Chase Doors | TMI  
 11502 Century Blvd.  
 Cincinnati, OH 45246  
 800.543.4455  
 info@senneca.com