

CUT THE CONFUSION
UNIVERSAL STRIP OFFERING
COMBINATION, DUAL-END
REPLACEMENT STRIP



TMI UNIVERSAL STRIP OFFERING FOR STRIP DOORS

Cut associate downtime and cost – no more searching for the “right fit” strip.


The TMI Universal Strip can save valuable time, cost, and hassle. This replacement strip offers an exclusive, one-of-a-kind, combination of mounting options to work with the majority of the strip door hardware on the market today. The universal strip combines all offerings for easy ordering.

The Universal Strip features a combination, dual-end hanging system designed to allow one of three mounting attachments. A simple trim to the end that is not needed will transform the Universal Strip into the desired replacement piece desired for the existing studded, fast mount or J-Hook system. A strong polycarbonate J-Hook allows for easy slide-in replacement on fast mount and J-Hook hardware. The reverse side is equipped with the universal hole pattern of 1" centers that can easily replace the majority of strips used in the market. Visit our website for details and to request a sample today.

TMI UNIVERSAL STRIP OFFERING FOR STRIP DOORS


CUT THE CONFUSION.
ONE SOURCE FOR ALL YOUR STRIP
REPLACEMENT NEEDS!

- Strips ready to mount out of the box
- Trim to customize strip
- Fits most strip door applications
- Available in 8" and 12" widths
- Proposition 65 compliant
- Available for standard and low temp applications

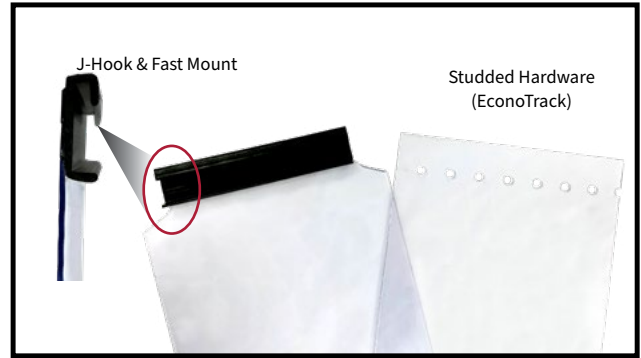

COMBINATION, DUAL-ENDS
Dual-end choices for strip door applications .

VERSATILE.
Hang the end needed.

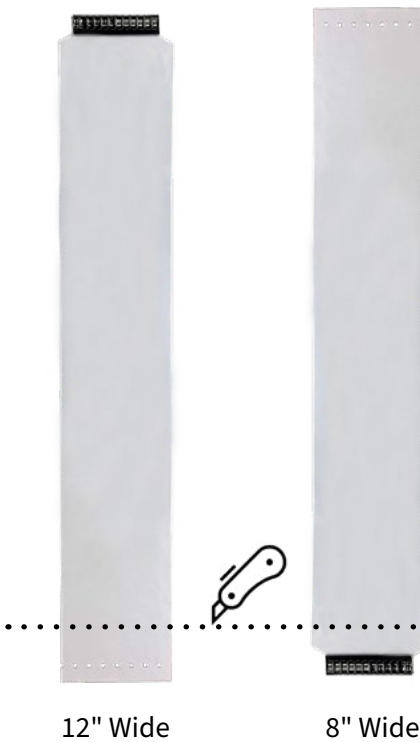

SHIPPING INFO

- Ships 5 to a box
- Actual shipped lengths vary

| Vinyl Thickness Guide | |
|-----------------------|--|
| .080 | |
| .120 | |

TRIM/CUTTING INSTRUCTIONS

1. Carefully measure existing strip that is being replaced.

2. Mark the strip length from the appropriate end.


For J-Hook Strips, start from the black plastic J-Hook end and cut off the section that has punched holes.

For EconoTrack Strips, start from the end that has the punched holes and cut off the section that has the black plastic J-Hook.

3. Use the existing strip as a template to mark and trim the J-Hook to required length.

For fast-mount, start from the end that has the punched holes and cut off the section that has the black plastic J-Hook.

VERSATILE
Trim the end not needed.

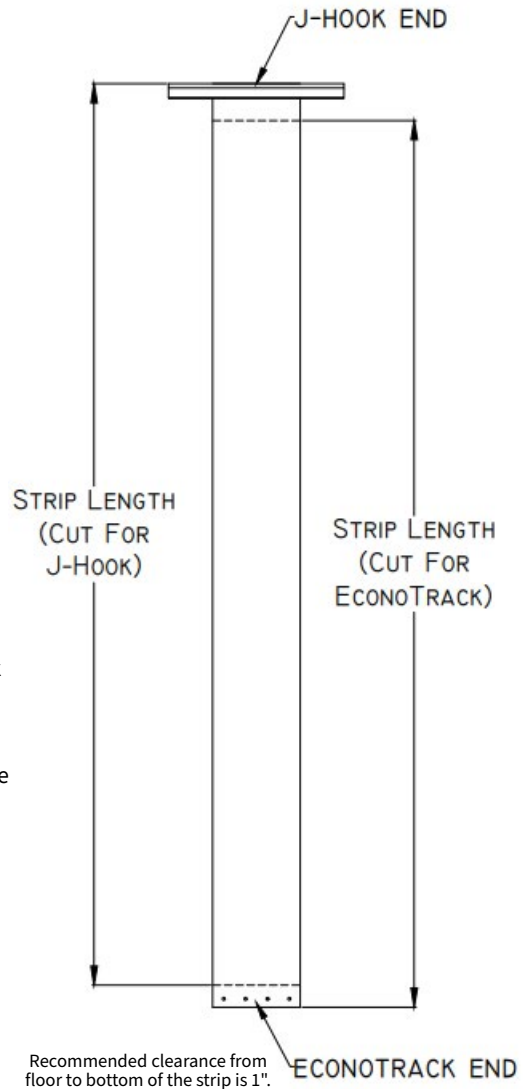

SENNECA HOLDINGS
11502 CENTURY BOULEVARD, CINCINNATI, OH 45246
WWW.SENNECA.COM

