

EcoAccess Order Form

Quote/Order# _____


Company Name: _____

Attention: _____



Email: _____

Phone#: _____

Job Name: _____

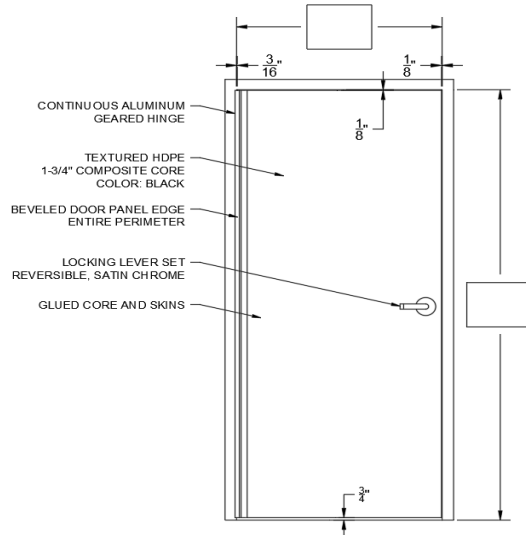

LOCK PREP REFERENCE LOCATION

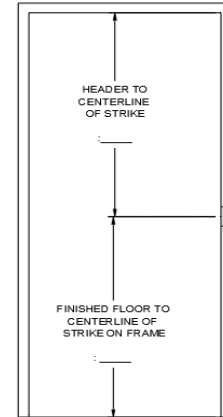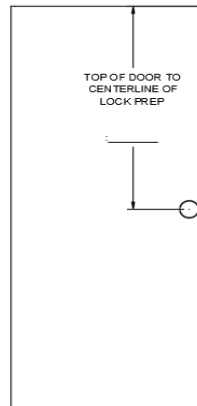

Fill in Opening Size in the Blanks Provided Above



STANDARD SPECIFICATIONS: Door body 1" thick Recycled HDPE with 3/8" textured HDPE skins on either side glued together to make a 1-3/4" thick panel. Panel edges finished with a 1/4" round over on full perimeter front and back. Door comes prepped for lockset installation at ordered height. Lockset, Half Surface mount Continuous geared hinge, and closer all sent loose for field installation. Windows and impact plates installed at the factory if ordered.

Installation Details: Installation Fasteners supplied with hinge and closer. See Installation instructions for individual components.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

WINDOW: ☐ 8" x 32" in Black steel Frame, Standard Offset, Up 57" to Center of Window from Floor
☐ 24" x 30" in Black steel Frame, Centered in Panel, Up 57" to Center of Window from Floor
☐ Other: _____

CLOSER: ☐ Aluminum Universal Closer Kit (Included not Prepped)

Hinge: ☐ Continuous Half-Surface Gear Hinge (Included not Prepped)
☐ Undersized For Half Surface STD WGT 4.5" Hinge (Not Included, Not Prepped)

LOCKSET: ☐ Harney Satin Chrome Lever Set w/ Schlage SC1 Keyway (Prepped and Included)
☐ 160 Cylindrical Prep
☐ 161 Cylindrical Prep
☐ Gov 86 Prep
☐ Gov 86 Prep w/ Escutcheon Trim

PLATE: Material: ☐ Stainless Steel Specify Height: _____
Plate Height: ☐ 6 ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 42 ☐ 48

HANDING: ☐ LEFT HAND ☐ RIGHT HAND ☐ LEFT HAND REVERSE ☐ RIGHT HAND REVERSE

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____