

DRIVE-THROUGH WINDOW AIR CURTAIN

The 2-Go Pro Air Curtain is designed for drive-through windows 24" wide and up to 42" high.


The variable speed motor is extremely quiet, so it won't impede drive-through attendants' ability to hear customers' orders.

- Blocks harmful carbon monoxide fumes from car exhaust from entering.
- Protects employees from inclement weather and flying insects.
- Lowers energy costs by preventing heated or conditioned air from escaping.
- Adjustable mounting brackets to adjust the air discharge by +/- 20 degrees.
- 304 SS outer case with corrosion-resistant steel blower housing and aluminum blower wheels.
- Available in electric heated (DT-24-EH) and unheated (DT-24) units.
- Optional magnetic door switch available.

2-Go pro



DT-24

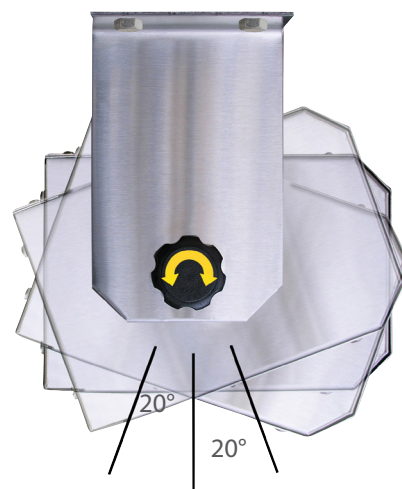


ADJUST AIR DISCHARGE BY +/- 20°

ceiling mounting illustrated


EASY TO INSTALL

Installation is extremely simple. The adjustable mounting brackets connect to the stainless steel casing with thumb screws, allowing for either wall or ceiling mounting, and only four 5/16" lag screws are required. Once the unit is mounted, simply plug it in to a properly grounded, 15 amp, 120 volt outlet.

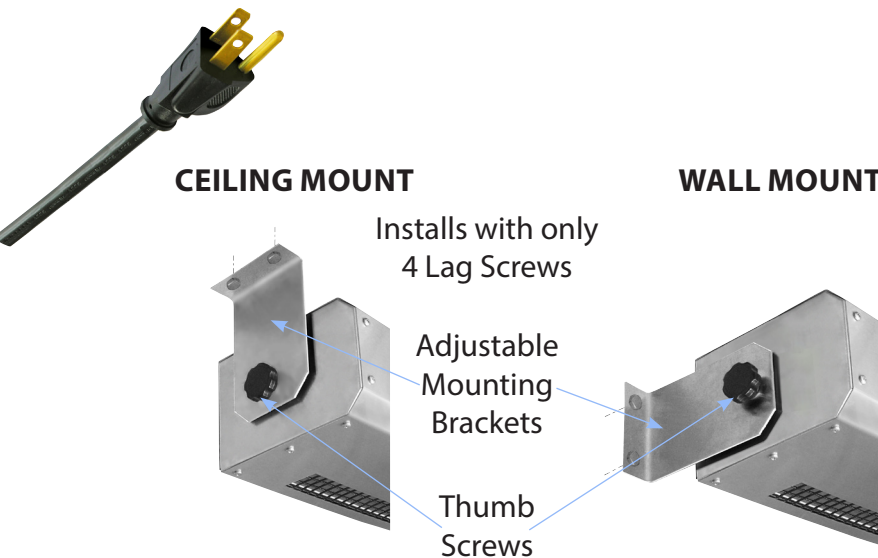

Fan/Off/Heat Switch
DT-24-EH only

Fan Speed Adjustment

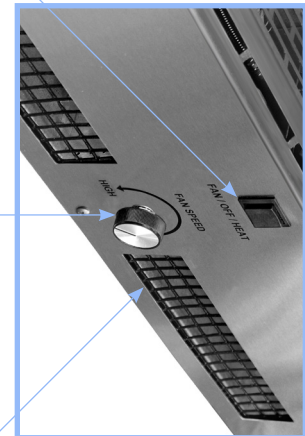

Air Discharge

SPECIFICATION INFORMATION

	DT-24
Nozzle Width ¹	24"
Avg FPM at Nozzle	1653
CFM at Nozzle	363
Motors	1
Watts	107
Amp Draw (Unheated)	1.7
Weight (Unheated)	13 lbs.
Heater kW	1.2
Temp Rise (F)	10.6°
Amp Draw (Heated)	11.2
Weight (Heated)	21 lbs.
Sound Level ²	50 dBA

¹ Nozzle width is equal to the opening width.

² Sound level measured 10' from the unit in a free field based on a one motor unit.

The Fan/Off/Heat switch, found only on the DT-24-EH, is a rocker switch. The Fan Speed Adjustment control is a rotating rheostat.

