



# Service-Pro Series SPD80 Order Form

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

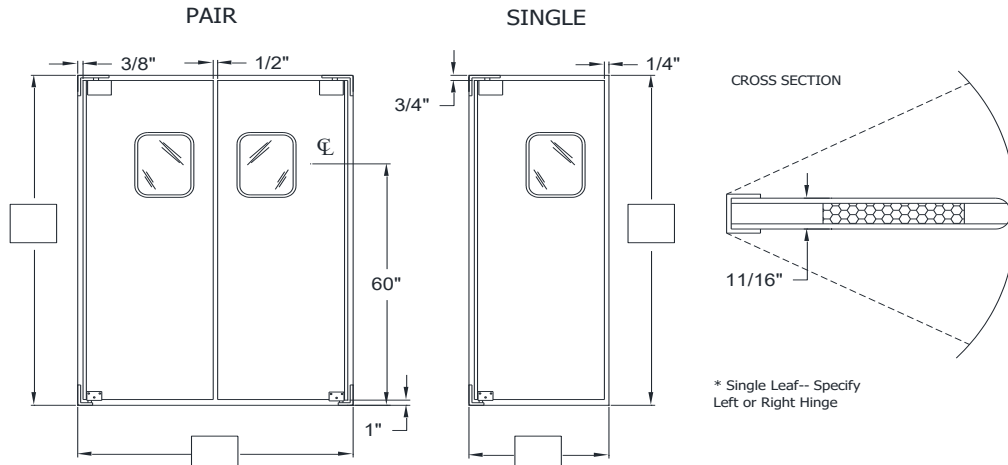

Fill in Opening Size in the Blanks Provided Above

**STANDARD SPECIFICATIONS:** Door body consists of 1/2" thick (Expanded PVC material) Inner Frame with honeycomb core; .080 thick high impact exterior thermoplastic surface with a textured finish bonded to both sides. Galvanized steel, powder coated black, back channel. 14" x 16" clear acrylic window set in black rubber molding. Door assembly includes E-Z Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

HANDING:      Left  Right  Pair

DOOR COLOR:    Forest Green  Cadet Blue  White  Metallic Gray  Cloud Gray  
                   Chocolate Brown  Red  Medium Brown  Royal Blue  Navy  Black  Beige  
                   Off White  Fudge Brown  Gray  Antique White

WINDOW:        Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor  
                   Other: \_\_\_\_\_

JAMB GUARD:    3" X 9"  5" X 18"  None

PLATE:         Specify Height: \_\_\_\_\_ .  Base Plate  Push Plate  
                  Color/Material:  Black  Same Color As Door  Stainless Steel  Other \_\_\_\_\_

BUMPER:       Standard Black Tear Drop Polyethylene Height:  12  18  24  30  36  42  
                  Aluminum Bumper Strip:

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_