



Save-T Air Curtains

Model: S-XHD Extra Heavy Duty

For Climate and Environmental Control on Openings up to 22' high and Insect Control on Openings up to 20' high.


PRODUCT DATA

Model	S-XHD-48-1	S-XHD-60-1	S-XHD-72-1	S-XHD-96-2	S-XHD-108-2	S-XHD-120-2	S-XHD-132-2	S-XHD-144-2	S-XHD-156-3	S-XHD-168-3	S-XHD-180-3	S-XHD-192-3
Nozzle Width Inches	48	60	72	96	108	120	132	144	156	168	180	192
Number of Motors	1	1	1	2	2	2	2	2	3	3	3	3
Horse Power	5	5	5	5	5	5	5	5	5	5	5	5
Max. FPM at Nozzle	6770	6770	6770	6770	6770	6770	6770	6770	6770	6770	6770	6770
Avg. FPM at Nozzle	5665	4490	5285	4990	4745	4490	4490	4490	4820	4660	4490	4990
CFM at Nozzle	6495	7700	9535	13365	14185	16225	16605	19745	20865	23510	23695	24035
Outlet Uniformity	92%	91%	95%	92%	95%	94%	94%	95%	94%	93%	94%	93%
Weight (Lbs)	400	435	450	765	795	825	850	865	1155	1190	1220	1240

Sound Level: 71 dba

Sound level measured 10 feet from the unit in a free field based on a one motor unit.

Three Phase Motor Voltage Available: 208 230 460 575
Amp Draw Per Motor: 17.1 15.8 7.9 6.3

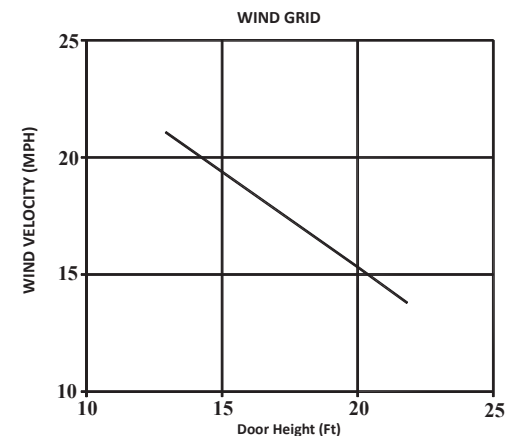

TMI, LLC
5350 Campbells Run Road • Pittsburgh, PA 15205
Toll Free: 1-800-888-9750 • Local: 412-787-9750 • Fax: 412-787-3665
Web: www.tmi-pvc.com